


EST-XLOGOUT-8C

Scheda 8 uscite logiche (control slot)

Overview

The logical output card has eight fully programmable relays which can be used for acknowledge the various states of the EST ENT VES outside to other systems. The channels from 1 to 4 are equipped with NC and channels from 5 to 8 with NO type of relays.

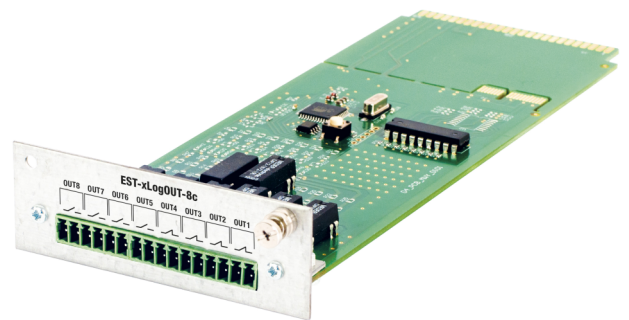

EST-XLOGOUT-8C

Scheda 8 uscite logiche (control slot)

Specifiche tecniche

Elettrico

Consumo attuale	10 mA at 48 V
-----------------	---------------

Fisico

Dimensioni fisiche	70 x 215 x 25 mm (W x H x D)
--------------------	------------------------------

Ambientale

Temperatura operativa	0 to +60°C
Temperatura di immagazzinamento	-20 to +70°C
Umidità relativa	15 to 80% noncondensing (Operation) 5 to 95% noncondensing (Storage)

Regolatorio

Standards	EN54-16
-----------	---------

Electrical

Power supply	Internal from the Control Unit
Switching current	0.5 A max.
Switching voltage	48 V max.
Switching power	20 W max.

Output

Number of logic outputs	8, each
Type of outputs	4 x NC; 4 x NO
Connector type	16 pin screw terminal type PHOENIX, 3.5 mm

Physical

Accessories	Connector with screw terminals 16 pins, the distance between the partitions of 3.5 mm
-------------	---