

MC352-4P-2S

4-Port 10/100/1000Base-Tx IEEE802.3at Copper + 2-Port SFP Unmanaged Media Converter (4x 30W PoE Budget) (-40~75°C) - Power 48V DC - Din rail or Wall Mount

Overview

The IFS® 4-Port Gigabit Ethernet to 2-Port SFP Industrial Media Converter is designed for the most demanding IP network applications offering the flexibility of SFP technology and wide operating temperature range. The MC352-4P-2S model provides full IEEE802.3-at (30w) PoE and serves as a PSE device.

SFP Technology

This model converts 10/100/1000Base-T Ethernet on copper to 100Base-X or 1000Base-X fiber via Small Form-factor Pluggable (SFP) technology. The media converter can be custom configured to your exact system design specifications by utilizing a variety of IFS SFP Mini-GBIC modules. IFS SFP Mini-GBIC modules are available in a variety of versions from multi-mode or single mode fiber, 1 or 2 fibers and wide-temperature versions.

Flexible Drop-and-Repeat or Redundant Path Operation

These models support 2 SFP ports that can easily be configured for either drop-and-repeat or redundant path operation. In drop-and-repeat mode, the unit operates like a 6-port switch and can be used as a repeater with an electrical drop or simply as an optical repeater/extender. In redundant path mode, the unit will quickly switch to the second SFP port as a redundant path if the primary optical path experiences an optical cable failure. Also, if the primary destination port link is down, the module will forward the data packet to the redundant path providing a highly fault-tolerant solution for mission critical IP applications.



Dettagli

- 10/100/1000 Base-SX/BX/LX/LHX/ZX and 100 Base-FX/BX/LX
- 10/100/1000Base-T: 2-pair Cat. 5e/6 UTP cable, up to 100 meters
- Complies with IEEE 802.3at and is backwards compatible with IEEE802.3af
- Inserts 52VDC (30w) power on Category network cable
- 2 SFP slots provide for custom configuration
- Optical fiber and distance varies by SFP (ordered separately)
- Plug-n-play installation
- Slim IP30 metal enclosure
- DIN-rail or wall-mounting
- 12 to 48 VDC, redundant power with reverse-polarity protection
- Alarm relay output for port breakdown and power-failure alert
- Complies with IEC60068-2-xx standards for free-fall, shock and vibration
- Wide operating temperature range of -40°C ~ +75°C
- Protects non-PoE devices if accidentally connected

MC352-4P-2S

4-Port 10/100/1000Base-Tx IEEE802.3at Copper + 2-Port SFP Unmanaged Media Converter (4x 30W PoE Budget) (-40~75°C) - Power 48V DC - Din rail or Wall Mount

Specifiche tecniche

Generale

Categoria	Industriale
Tipo	Da Ethernet a SFP
Cambia velocità effettiva (Mpps)	14.8
Lascia cadere e ripeti	Si
Uscita guasto relè	Si

Conessioni

No. di porte	4
Velocità porta	Gigabit
Tipo porta	10/100/1000
Porta fibra	2
Tipo porta fibra	SFP
Velocità porta fibra	1000Base SX/BX/LX/LHX/ZX or 100Base FX/LX/BX
Supporto SFPs	S20/S25 series, S30/S35 series
Distanza fibra	SFP dependant
Connettore fibra	LC
Lunghezza d'onda	SFP dependant

Elettrico

Tipo di alimentatore	48 VDC
Consumo di energia	135 W
PoE	Si
PoE / PoE+	4 port PoE+ (802.3at)
Alimentazione ridondante	Si

Fisico

Dimensioni fisiche	135 x 87 x 32 mm
Peso netto	1.539 kg
Tipo di montaggio	barra DIN, Montaggio a parete

Ambientale

Temperatura operativa	-40 to +75°C
IP rating	IP30

Ethernet

Data Rate	10/100/1000 Base-T
Throughput (packet per second)	1,488,000pps
Switch Architecture	Store-and-forward
Jumbo Packet Size	9K
Flow Control	Back Pressure for Half Duplex, Mode Pause for Full-Duplex Mode IEEE 802.3x
Connector	RJ-45 (Auto-MDI/MDI-X)
Cable Type and Distance	10Base-T: 2-pair UTP Cat. 3,4,5, up to 100 m (328 ft.) / 100Base-TX: 2-pair UTP Cat. 5e, up to 100 m (328 ft.) / 1000 Base-T: 4-pair UTP Cat. 5e, 6 up to 100m (328 ft.)

Fiber

PoE Standard	IEEE 802.3af / 802.3at High Power over Ethernet / PSE
Power PIN Assignment	End-Span, (+) Pins 1 & 2; (-) Pins 3 & 6
Power Output per Port	52VDC 15.4 Watts or 52VDC 30 Watts
Data Rate	100Base-FX/BX/LX and 1000Base-SX/BX/LX/LHX/ZX
Connector	SFP (Mini-GBIC) port
Fiber Type and Distance	Varies by SFP module

LED Indicators & Controls

Power/Status	Green/On - power
10/100/1000Base-TX port	Green/On - active port (TX/RX), Amber/On - PoE in-use
SFP (Mini-GBIC) port link	Green/On - link established

Electrical & Mechanical

Power	48VDC (15.1 watts no PoE; 135.1W full load)
Enclosure	IP30 rated metal enclosure
Dimensions (H x W x D)	2.8 x 5.9 x 4.2 in. (72 x 152 x 107mm)
Weight	3.39 lbs. / 1539 grams

Environmental

Operating Temperature	-40°C ~ +75°C
Storage Temperature	-40°C ~ +85°C
Relative Humidity	5% ~ 90% (non-condensing)
MTBF	> 50,000 hrs @ 25°C

Standards Compliance


IEEE	IEEE 802.3 10Base-T / IEEE 802.3u 100Base-TX / 100Base-FX / IEEE 802.3ab 1000Base-TX / IEEE 802.3z 1000Base-SX/LX/BX / IEEE 802.3x Flow Control and Back Pressure
EMI	EN 55022 CLASS A / EN61000-3-2:2006 / EN61000-3-3: 1995+1A:2001+A2:2005
EMS	EN 55024:1998+A1:2001+A2:2003 / IEC 61000-4-2:2001 / IEC 61000-4-3:2008 / IEC 61000-4-4:2004 / IEC 61000-4-5:2005 / IEC 61000-4-6:2008 / IEC 61000-4-8:2001

Prodotti compatibili

Categoria	Riferimento	Descrizione
Alimentatori	PS48VDC240W-DIN	100-240V AC Input 48VDC 240W Power Supply with DIN rail mount

MC352-4P-2S

4-Port 10/100/1000Base-Tx IEEE802.3at Copper + 2-Port SFP Unmanaged Media Converter (4x 30W PoE Budget) (-40~75°C) - Power 48V DC - Din rail or Wall Mount

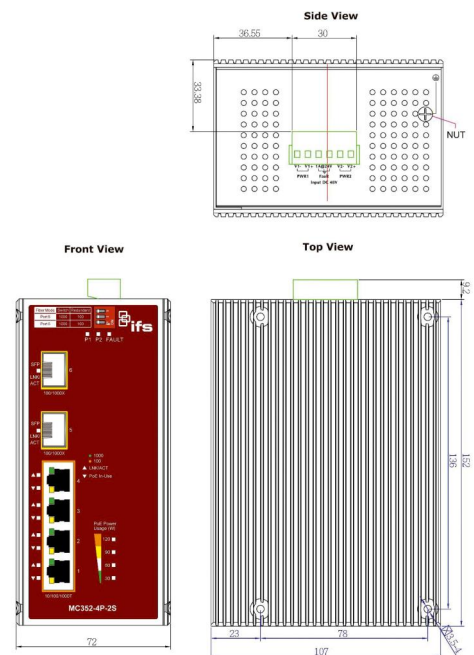

In quanto azienda in continua innovazione, Kidde Global Solutions si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 30 January 2024 - 18:11