



TCC-0007

Sirena con lampeggiante arancione ATEX Ex a sicurezza intrinseca, 24 V

IS Sonos sounder beacon

The IS Sonos sounder beacon has been approved for use in potentially explosive atmospheres for Group I (Mining) & Group II (Above Ground) applications and incorporates a high Ingress Protected IP66 enclosure.


The sounder beacon unit incorporates a two stage alarm option and has a total of 32 selectable tones, selectable via a dip switch on the PCB and produces up to 105 dB at 1 meter. A specially designed time saver base enables quick and easy installation of this unit with no extra cabling to be made to the head of the unit.

Connections are made to the base during the initial wiring phase which results in a faster more reliable installation. The sounder head simply twists & clicks into the pre-fixed base on commissioning avoiding any additional wiring & connections. Further details can be found on the installation sheet.

This unit must be used in conjunction with an approved Zener Barrier or Galvanic Isolator. The characteristics should not exceed U_o : 28 V, I_o : 93 mA, P_o : 660 mW, C_i : 0, L_i 0. The minimum value of U_o should not drop below 23.6 V and the minimum value of I_o should not drop below 50 mA.

Application

Fire, Security, Process Control and general signalling applications.

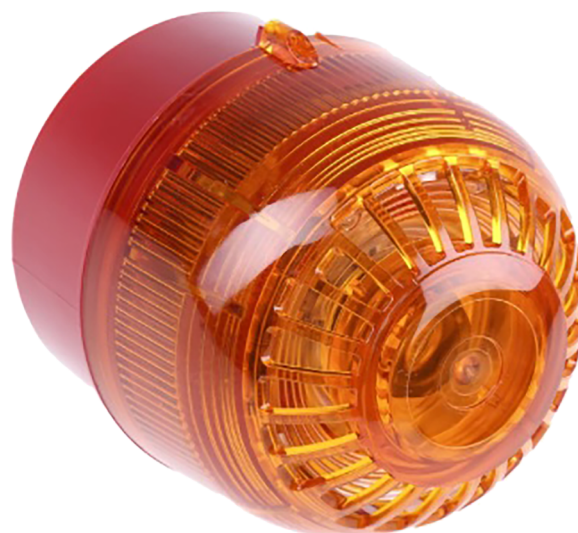

Dettagli

- Approved by ATEX, IECEx
- Group I MI Ex ia I Ma
- Group II IGD Ex ia IIC T6 Ga, Ex ia IIIC T85°C Da
- Zones 0, 1, 2, 20, 21 & 22
- Conforms to: EN 60079-0:2012 + All:2013 (IEC 60079-0:2011)
EN-60079-11:2012 + (IEC 60079-11:2011)
- Diode Polarised and End of Line resistor compatible
- Dustproof and weatherproof

TCC-0007

Sirena con lampeggiante arancione ATEX Ex a sicurezza intrinseca, 24 V

Specifiche tecniche

Generale

Compatibilità	TCC-0012, GBX370
System support	Conventional intrinsically safe systems

Elettrico

Tipo di alimentatore	24 VDC
Tensione di esercizio	24 VDC
Consumo attuale	33 mA

Sirena

Livello di uscita	>105 dB(A)
Toni selezionabili	32
Numero di stadi	2

VID

Colore	Amber
Frequenza Flash	1 Hz or constant (ON)

Fisico

Peso netto	0.33 kg
Colore	Rosso
Tipo di montaggio	Montaggio su base
Posizione di montaggio	Soffitto, Parete
Base di montaggio	Profondo
Trama	Smooth

Ambientale

A prova di vandalo	No
Temperatura operativa	-40 to +55°C
Umidità relativa	>90% at 20°C
Valutazione ambientale pericolosa	Intrinsically safe - Zones 0, 1, 2, 20, 21 & 22
IP rating	IP66

Regolatorio

Conformità	CE, REACH, RoHS 3, WEEE
Certificazioni	CENELEC/ATEX, CPR
Standards	ATEX (EMT17ATEX0012X) IECEx (EMT 17.0005X) EN54-3