



TDA1440-4-IP-KIT

Kit including the TDA1440-4 Alarm dialer communicating (via IP and Cellular with 4G support) and the ATS1801 (ATS computer and printer interface)

Introduction

TDA14xx-4 Series offers cost effective Alarm over IP (AoIP) for the commercial and residential sectors.

All TDA14xx-4 Series diallers are certified as suitable for all Grade 4 systems with an Alarm Transmission System (ATS) configuration up to SP6 for single path, or ATS configuration DP4 for dual path with this TDA1440-4.

TDA14xx-4 Series is based on the successful TDA14xxNG Series range of AoIP diallers with the same hardware and software used in all diallers; with the same level of security and features provided to military, governments, banks and commercial industry markets.

TDA14xx-4 Series offers a touch screen as standard for configuration, local alerts, and allows diagnostic and tests to be performed by the engineer.


Polling and alarm transmission are performed via the Ethernet or 2/3/4G communication to the monitoring center using the IRIS Secure Apps monitoring software.

All data transferred for polling and alarms is encrypted using the same security key used for authentication.

Communications with the receiver (Polling Engine) uses EN 50136-2 pass-through mode.

Package contents

- Dialler board
- Ethernet cable
- 2/3/4G antenna
- Stylus for touch screen navigation
- RJ11 cable
- 18 k Ω sense resistor for dial capture tamper detection

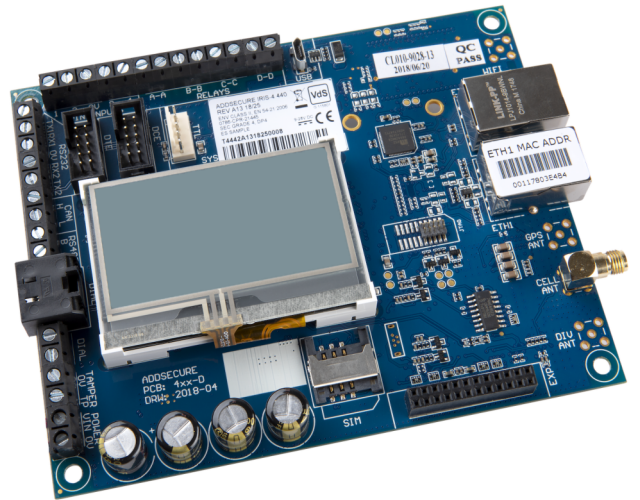

TDA1440-4-IP-KIT

Kit including the TDA1440-4 Alarm dialer communicating (via IP and Cellular with 4G support) and the ATS1801 (ATS computer and printer interface)

Specifiche tecniche

Generale

Linee prodotto	Advisor Advanced, ATS Master
----------------	------------------------------

Rete

Tipo di comunicatore	2G, 3G, 4G, IP
Frequenza GSM	Penta band LTE (4G) 800/900/1800 MHz 2100/2600 MHz Dual band UMTS (3G) 900/2100 MHz Dual band GSM (2G) 900/1800 MHz

Segnalazione

Protocolli di segnalazione	SIA
Ricevitori supportati	IRIS Secure Apps (Chiron)

Interfaccia

Ethernet	RJ-45 10/100 Mbps self-adaptive Ethernet interface
Antenna	Si, incluso

Ingresso / uscita

Ingressi	4 standard pins and 12 with add-on daughter board
----------	---

Elettrico

Tensione di esercizio	9 to 28 VDC
Consumo attuale	153 mA at 12 VDC

Fisico

Dimensioni fisiche	15 cm x 11 cm
Peso netto	300 g
Peso spedizione	500 g
Materiale	---

Ambientale

Temperatura operativa	-10 to +55°C
Umidità relativa	95% max., noncondensing

Regolatorio

Conformità	CE
Certificazioni	EN50131, EN54-21



In quanto azienda in continua innovazione, Kidde Global Solutions si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 5 May 2023 - 10:32