1074D-N

Flanged recessed mount magnetic contact, white

Applications

The Sentrol 1072 series recessed contacts are designed for applications where the added integrity of mounting screws is needed. The units work well in both wood and metal frame doors and windows.

Easy Installation

The two mounting holes provide additional strength to prevent the contact and magnet from becoming dislodged due to environmental changes. This can occur when the door or window frames become warped and misaligned from moisture or the settling of a building.

Durability and dependability

The Sentrol high performance magnetic contacts have been designed to facilitate installation and ensure durability and dependability. Most are conservatively rated at 10,000,000 cycles, guaranteeing a long life. Every reed connection is hand soldered and each magnetic contact is tested before they leave the factory, 100% of the time.

High quality components and materials

Reed legs are plated with rhodium or ruthenium, and hermetically sealed in dry nitrogen. This offers superior protection against sticking and provides a moisture free environment therefore preventing corrosion.



Details

- Flange mounting for positive mounting; oversized holes
- Attractive, added security of recessed installation
- Mounting screws included

1074D-N

Flanged recessed mount magnetic contact, white

Technische specificaties

Algemeen

Type toepassing	Verzonken montage
Type contact	DPDT
Aansluiting	30 cm wire leads

Bedraad / draadloos

Bedraad / draadloos	Bekabeld
Werkingsafstand	13 mm (max.)

Fysiek

Fysieke afmetingen	9 x 33 mm (Ø x L) (body) 19 mm (Ø) (flangle)
Kleur	Wit

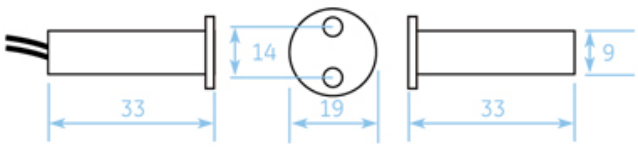

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 18 June 2026 - 14:22