

AD044

External "addressable security system" interface, four input, four output



Details

- 2/4 wire external interface
- Four inputs to monitor non-addressable devices
- Four outputs
- If needed powered through auxiliary power supply
- Used for any sensor

AD044

External "addressable security system" interface, four input, four output

Technische specificaties

Algemeen

Accessoire groep	Bewegingssensoren
Type	Module

Elektrisch

Type voeding	VDC
Bedrijfsspanning	12 VDC 24 VDC
Current consumption	500 mA

Fysiek

Fysieke afmetingen	173 x 122 x 51 mm
Colour	Wit

Omgeving

Operating temperature	0 to 55°C
Relatieve vochtigheid	max. 90%
Omgeving	Binnen

Electrical


Bus protocol	Interlogix property
Bus voltage	12 VDC or 24 VDC
External power supply	9 to 13.8 VDC
Current consumption from Bus	290 microA

General

Address range	0 to 255
Unit load for DGP	1

Output

Open collector current output	100 microA max.
Output current	500 mA max. each

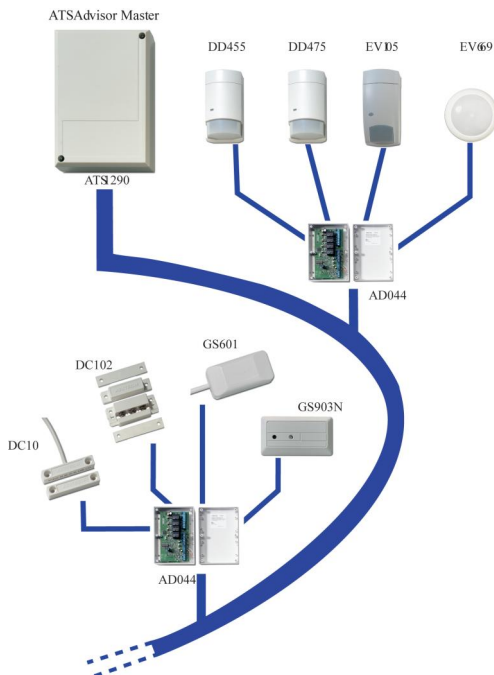

Als een bedrijf van innovatie behoudt Carrier Fire & Security zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 10 April 2024 - 11:04