

# ATS1481

## ATS Reader Address Configuration Card for Smart Card Readers


### Product Overview

---

The ATS1481 reader configuration card allow for an operator to specify the reader address of smart card readers without any programming device or menu configuration.

The reader address easily can be changed, by just badging at reader that needs to be changed.

Instructions are at the back of the card.

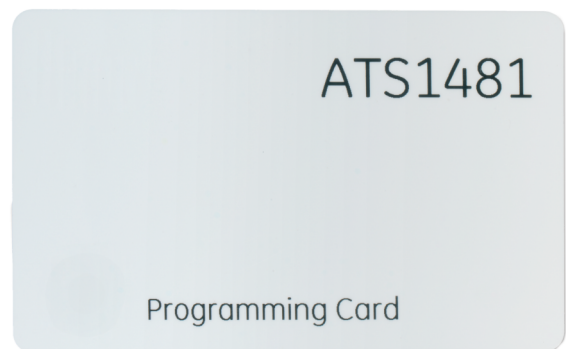

### Details

---

- Instructions on flip side of the card

# ATS1481

## ATS Reader Address Configuration Card for Smart Card Readers

### Technische specificaties

---

#### Stelsiem

Leesafstand	0 to 30 cm
Aangepast datamodel	Nee
Ondersteunde lezers	ATS Proximity Readers

#### Technologie

Type kaart	Configuratiekaart, Nabijheid
Bedrijfsfrequentie kaart	125 KHz

#### Printen

Direct oppervlakte printen	Ja
----------------------------	----

#### Bestelinformatie

Minimum bestelhoeveelheid	1
Kaarten / tags in verpakking	1

#### Fysiek

Materiaal	PVC
Vormfactor	CR80 (Credit)
Fysieke afmetingen	86 x 54 mm
Kleur	Wit
Kaartlabel	Programming Card