

# TVN-2208S-2T

## TruVision™ NVR 22 recorder, 8 IP channels, integrated PoE switch, 2TB, H.265 NVR

### Product overview

TruVision NVR 22S (TVN 22S) is a robust high performance H.264/H.265 network video recorder with 8 or 16 embedded plug & play PoE ports.

With a total bandwidth of 80/160 Mbps available, the TVN 22S is able to connect up to 8/16 IP cameras and provide real time recording (25/30 fps) at Full HD 1080p resolution on all channels simultaneously. With its fully flexible bandwidth allocation, the TVN 22S allows recording resolutions up to 8MP at various frame rates.

### Plug-&-play functionality

Setting up TVN 22S is easy. Its embedded PoE ports allow you to connect TruVision IP cameras as they were analog cameras. When plugged in, cameras are automatically assigned IP addresses, added to the recorder and set up at default configuration. Each IP camera can also be set up individually to ensure full flexibility.

The fully flexible PoE allocation feature ensures an optimally efficient use of the PoE power available.

### Ease of use

TVN 22S allows users full flexibility in the way they want to configure, manage and monitor their video surveillance solution. In addition to management of the unit through its browser interface or TruVision Navigator, the TVN 22S allows users to also operate the recorder locally using its front panel controls, local VGA or HDMI outputs and its intuitive on screen display.

### H.265

The TVN 22S is supporting both H.264 and H.265 compression techniques. The H.265 compression is the next evolution of video encoding. Using H.265 will result in a reduced file size for the same video content and a reduced transmission bandwidth compared to H.264. This means that for the same storage capacity more video can be stored when using H.265 than H.264 encoding. To use the H.265 encoding in the TVN 22S, TruVision H.265 cameras need to be used.

### Recording performance

The maximum on-board storage capacity for the TVN 22S is 24TB, using four six TB hard drives. The hard drives can be accessed via the lockable front panel door, allowing customers to easily expand storage as their system and/or requirements grow. Recording options include continuous, event and alarm. The three modes can be combined, to ensure that the most efficient recording is possible.

### Basic intrusion integration

TVN 22 has an alarm receiver module embedded inside. The alarm message receiver can connect to up to three Interlogix IP intrusion panels that report in SIA or XSIA format.

Alarm messages, disarming and arming messages can be send from



### Details

- Linux embedded Plug and Play configuration
- Up to 80 Mbps camera recording bandwidth
- Up to 8 IP channels
- Up to 8 embedded PoE camera ports
- PoE-af & PoE-at support
- Up to 24TB embedded storage (4x 6TB)
- Flip-open front panel for easy HDD access, servicing and expansion
- New icon based front panel
- Real time Full HD recording
- Motion detection, VCA, privacy masking, tamper detection
- TruVision IP camera auto-detection
- Third party camera support via ONVIF and PSIA
- IP camera configuration import/export
- Custom protocol configuration (RTSP streaming)
- Integration of Carrier IP intrusion panels via SIA/XSIA reporting
- Recorder failover functionality (one failover unit per 4 operational recorders)
- TVK-800 IP Keypad support (No display of H.265 cameras possible on LCD display)
- USB DVD burner support
- Full browser-, OSD- and software-based access for live, recorded & configuration
- TVRmobile app for iOS and Android
- TruVision Navigator license-free client/host or standalone application
- TVRmobile app for Android and iOS

the alarm panel to the recorder, which then can take actions (trigger alarm recording, send a PTZ to a preset, run a shadow tour or preset tour, trigger an alarm output or send a notification message to TVRmobile). Also the heartbeat message between panel and recorder is monitored. This solution offers straightforward alarm verification and is free of charge.

# TVN-2208S-2T

TruVision™ NVR 22 recorder, 8 IP channels, integrated PoE switch, 2TB, H.265 NVR

## Technische specificaties

### Algemeen

|                          |       |
|--------------------------|-------|
| Technology               | IP    |
| Rack mountable           | Ja    |
| Rack stacking size       | 1.5 U |
| Verwijderbare ventilator | Nee   |
| Redundante voeding       | Nee   |

### Video / audio input

|                                       |                                          |
|---------------------------------------|------------------------------------------|
| Camera channels                       | 8                                        |
| IP camera channels                    | 8                                        |
| Max. bandbreedte per kanaal           | 16                                       |
| Camera bandwidth                      | 80                                       |
| Max. IP audio in                      | 8                                        |
| Max. analog audio in                  | 1                                        |
| Supported video compression standards | H.264, H.265, MPEG-4                     |
| Supported video streaming standards   | Onvif, PSIA, RTSP, RTSP Custom Protocols |

### Local viewing

|                                     |                  |
|-------------------------------------|------------------|
| HDMI output                         | 1                |
| HDMI version                        | 2.0              |
| VGA output                          | 1                |
| BNC-uitgang                         | 1                |
| Max. local output resolution        | 4K               |
| Synchronous playback OSD (channels) | Up to 8 channels |
| Achteruit afspelen OSD (kanalen)    | 1                |

### Weergave op afstand

|                                         |                                                                                    |
|-----------------------------------------|------------------------------------------------------------------------------------|
| Total available viewing bandwidth       | 160                                                                                |
| Max. live viewing streams               | 128                                                                                |
| Max. playback viewing streams           | 128                                                                                |
| Max. afspeelresolutie webbrowser        | 8 MP                                                                               |
| Max. simultaneous playback web browser  | Max. 16 tiles (4x4)                                                                |
| Reverse playback web browser (channels) | Up to 9 channels, depending on PC performance                                      |
| Software compatibility                  | Advisor Management Software (ATS8600), TruVision Navigator, TVRmobile, Web Browser |
| Browser compatibility                   | Google Chrome, Internet Explorer, Mozilla Firefox, Safari                          |

### Opslag

|                                 |                                                       |
|---------------------------------|-------------------------------------------------------|
| Storage capacity                | 2 TB                                                  |
| Opslagcapaciteit (TB)           | 2                                                     |
| SATA interfaces                 | 4                                                     |
| Max. capacity per SATA HDD (TB) | 6                                                     |
| Maximum recording resolution    | 12 MP                                                 |
| Recording modes                 | Alarm, Event, Manual, Time-lapse high, Time-lapse low |
| Dualstream opname (kanalen)     | 8                                                     |
| External storage                | eSATA, NAS, SAN                                       |
| Harde schijf redundantie        | Nee                                                   |
| Hard drive grouping             | Nee                                                   |
| SAS-extensie                    | Nee                                                   |
| Opklapbaar voorpaneel           | Nee                                                   |
| Automatische archivering        | Ja                                                    |
| Hot spare-recorder              | Ja                                                    |
| Edge failover recording         | Ja                                                    |

### Netwerken

|                               |                                                         |
|-------------------------------|---------------------------------------------------------|
| Network interface cards (NIC) | 2                                                       |
| NIC type                      | RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface |
| Netwerkpporten per NIC        | 1                                                       |
| PoE ports                     | 8                                                       |
| Totaal PoE-budget             | 200 W                                                   |
| Ondersteunde PoE-standaarden  | PoE-af, PoE-at                                          |
| Plug & Play PoE ondersteuning | Ja                                                      |
| Flexibele PoE-toewijzing      | Ja                                                      |
| DNS support                   | DDNS, ezDDNS, Geen IP                                   |
| HTTPS support                 | Ja                                                      |

### Externe interfaces

|                           |        |
|---------------------------|--------|
| USB interface back        | 1      |
| USB interface front       | 2      |
| Seriële interface         | RS-232 |
| Alarm inputs              | 16     |
| Alarm outputs             | 4      |
| Max. analog audio outputs | 1      |

### Elektrisch

|                                   |                 |
|-----------------------------------|-----------------|
| Power supply type                 | 100 tot 240 VAC |
| Power consumption without HDD (W) | 45              |

### Fysiek

|                     |                   |
|---------------------|-------------------|
| Physical dimensions | 442 × 371 × 74 mm |
| Colour              | Zwart             |

# TVN-2208S-2T

TruVision™ NVR 22 recorder, 8 IP channels, integrated PoE switch, 2TB, H.265 NVR



## Omgeving

Operating temperature -10 to +55°C

Relative humidity 10 to 90%

## Regelgeving

Compliancy CE, REACH, RoHS, UL

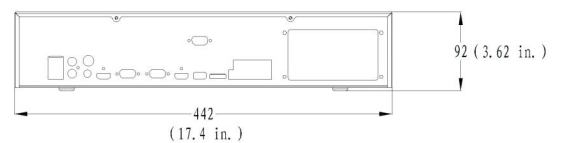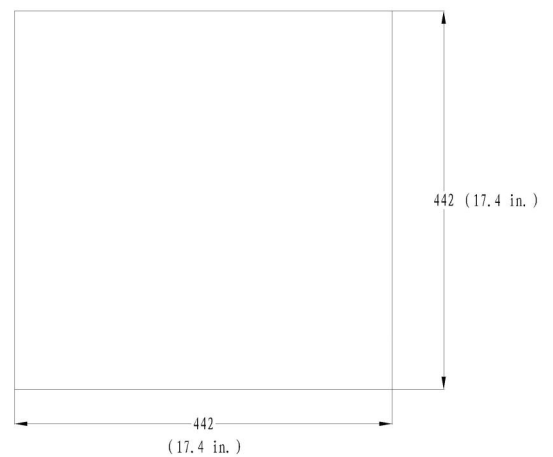

Als een bedrijf van innovatie behoudt Carrier Fire & Security zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar [be.firesecurityproducts.com](http://be.firesecurityproducts.com) of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 18 April 2024 - 16:52