VE736AM

PIR/AM Detector with 11 curtains & 1 curtain of 20 m & 60 m CO Relay

Patented Pyro & V2E signal processing

Unlike conventional sensors, our patented Vector pyro captures multi-dimensional signals, allowing it to not only detect the presence of a thermal source but also determine its direction of motion. This breakthrough technology enhances detection probability by combining optics resolution with the pyro's advanced output. Our VE series motion detectors incorporate as well Vector Verified Enhanced (V2E) signal processing, which analyzes and distinguishes different signal sources. False alarms caused by non-thermal sources or environmental factors like stationary thermal sources or strong light are therefore filtered out.

Optics

The optical part of the VE736AM is identical to the VE735. The step & glide focus mirror with multi curtains are unique features providing maximum coverage density and ensure easy installation. With the "High Density Optic" (HDO) mirror, the VE700AM series will provide you with more and wider curtains (and therefore untraceable detection gaps). The VE736AM is the only AM motion detector on the market that can offer both 90° wide angle and long range detection pattern in one product.

Patented multi channel Anti-Masking

Our VE736AM uses five IR transmitters and receivers working in different frequencies. This results in various AM signals for the sensor. The AM circuit will not be triggered by the magnitude of modified light on each channel but with the relationship between the various signals. The multi channels AM technology makes VE736AM capable of detecting any AM attempt, up to 30 cm from the detector. VE736AM is also immune to: Partial masking attempt, System malfunction, Insect presence, White-light jamming.

Chime & settings

Other VE736AM features, like chime mode and setting are identical to the VE736. For the customer the VE700 allows you to determine the direction of the intruder across the surveillance area. When the chime mode is ON, the VE700 can trigger an alarm when an intruder walks from left-to-right and differentiate intruder movement from right-to-left, and vice versa. The sensitivity settings (Low, Standard and High) ensure the best performance for most applications. The sensitivity level can be easily modified with a jumper.

Self-test, Plug-in electronics & Accessories

All electronics components of the VE736AM are monitored constantly in order to report the unlikely case of a defect. The plug-in concept ensures easy installation without any worry about damaging the sensor so all setting can be done conveniently in your hand. The VE710 laser alignment tool is the recommended tool to use during installation for aligning the sensors in long corridor applications.



Details

- Passive Infra Red motion sensor
- Multi channel Anti Masking for all masking attempt
- High density "Step & Gliding Focus" Multi Curtain mirror
- Plug-in electronics
- Sealed optics
- "Vector Verified Enhanced" detection algorithm
- Selectable range with full undercrawl detection
- Selectable AM reporting and resetting
- 3 alarm sensitivities
- No adjustment required for different mounting heights
- Tolerates wall angle deviation
- Pry-off and cover tamper
- Complies with EN50131-2-2, Grade 3
- Several European approvals

VE736AM

PIR/AM Detector with 11 curtains & 1 curtain of 20 m & 60 m CO Relay

Technische specificaties

Algemeen

Technologie	PIR
Type toepassing	Muurmontage
Anti-maskering	Ja
Ongevoelig voor huisdieren	Nee
Camera	Nee
Signaalverwerking	Vector Verified Enhanced (VE2)
Afneembeveiligingskit	On board

Detectie

Max. detectiebereik	60 m
Detectiebereik	60 m
Detectiebereik selectie	20 m or 60 m
Aantal gordijnvelden	11
Openingshoek (kijkveld)	86°
Onderkruipbeveiliging	Ja
Doel snelheidsbereik	0,1 to 4.0 m/s
Alarmgeheugen	Ja
Alarmtijd	3 s
Piek-tot-piek rimpelbestendigheid	2V (at 12 VDC)

Bedraad / draadloos

Bedraad / draadloos	Bekabeld

Ingangen / uitgangen

Alarmrelais karakteristiek	NO/NC, 80 mA 30 VDC, Form C (voltage free)
sabotagerelais karakteristiek	NC when cover closed, 80 mA 30 VDC, Form A (voltage free)
Antimaskeerrelais karakteristiek	NC when no AM, 80 mA 30 VDC, Form A (voltage free)
Stuurdraden op afstand	Day/Night, Walk test

Elektrisch

Bedrijfsspanning	9 to 15 VDC (12V nominal)
Stroomverbruik	20 mA (nom.)

Fysiek

Fysieke afmetingen	93 x 175 x 66 mm (W x H x D)
Netto gewicht	275 g
Kleur	Wit
Montagehoogte	1.8 to 3 m

Omgeving

Bedrijfstemperatuur	-10 to +55°C
Relatieve vochtigheid	0 to 95% noncondensing
Omgeving	Binnen
IP-classificatie	IP30

Regelgeving

EN50131 Grade	Grade 3
Certificering	VdS

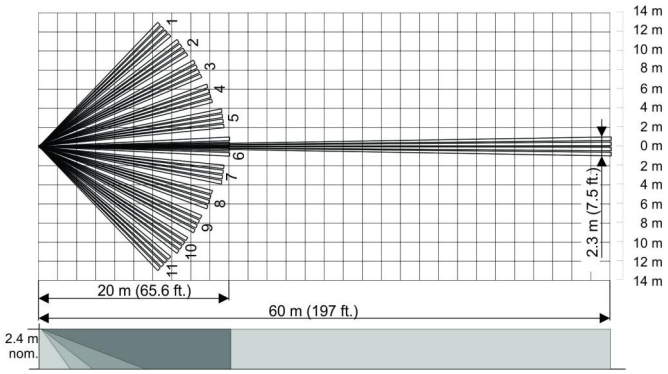

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 18 June 2026 - 14:33