ATS1170

Wiegand kaartlezer interface.

Product overview

The ATS1170 is a Single Door Controller with a built-in interface for Wiegand readers.
The unit will be polled as a RAS on the RS485 data bus and therefore needs to be programmed as a Non LCD RAS. You can connect now ATS readers directly to the ATS bus, allowing them to be used as a RAS for arming/disarming.
For special applications the unit can operate in a limited off line mode with an external 12 VDC power supply. In this off line mode a database for 20 users is available. It can be used as a standard door controller. For access control applications a Request To Exit input and one relay for an electrical door lock are standard available on board.

Installation

ATS1170 PCB can be mounted in any existing control panel housing which supports the size B board. Addressing : DIP switches 1 to 4 are used to identify the RAS number.

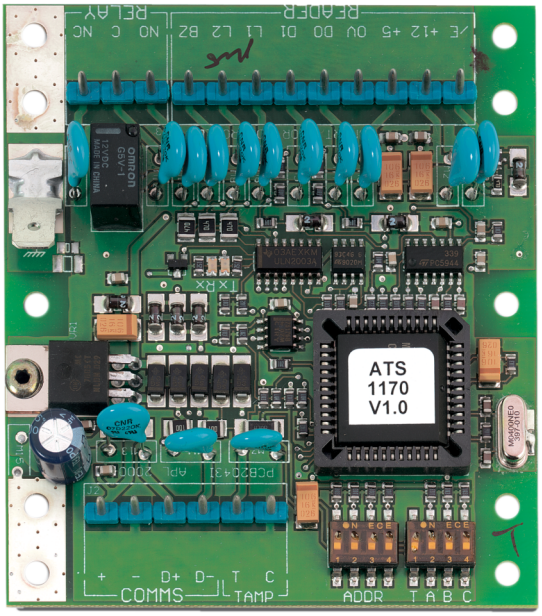

Details

- Single Door Controller with offline database for 20 users
- Provides connectivity to Wiegand readers
- Compatible with Axon and Advisor Advanced panels
- Operational in stand-alone with an external 12 VDC power supply
- Polled as a RAS on the RS485 data bus
- Request To Exit input on board
- 1 relay on board for electrical door lock
- Aux power O/P is 5 V, 100 mA max. for readers
- Max. number on panel bus - 15
- Specified cable: Aritech WCAT 52/54 or equivalent
- Compatible formats on control panels, Wiegand 26 bits, MagSwipe

ATS1170

Wiegand kaartlezer interface.

Technische specificaties

Systeem

Max. afstand lezer tot paneel	1.5 km from control panel
Type adressering	DIP Switches
Aantal inbegrepen afdekkappen	No

Technologie

Type lezer	Interface

Interface & aansluitingen

Interface	ATS RS-485, Wiegand
Type aansluiting	Aansluitstrip

Ingangen / uitgangen

Ingangen	Request to exit
Uitgangen	Aux relay - Form C, switches up to 1A @ 30 VDC

Bediening

Codebediendeel	Nee

Elektrisch

Bedrijfsspanning	10.5 to 13.8 VDC
Stroomverbruik	45 mA typical (no peripheral devices fitted)

Fysiek

Fysieke afmetingen	80 x 52 mm (W x H)
Type montage	PCB montage

Omgeving

Bedrijfstemperatuur	0 to +50°C

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar nl.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 18 June 2026 - 14:24