DC110


Poort/overheadcont., sabo.lus, 2 m kabel, afstand van 19-63mm, wisselcont.

Overhead door magnetic contact

The DC110 overhead door magnetic contact is for use in the rigorous environments for commercial and industrial installations. The floor mount units are constructed with a low profile heavy cast aluminium housing. The reed switch assembly is fully encased in an exclusive polyurethane potting material to prevent damage due to moisture or humidity.

Easy installation

A wide operating gap distance makes installation easy and helps prevent false alarms caused by door movement or damaged and loose fitting doors.

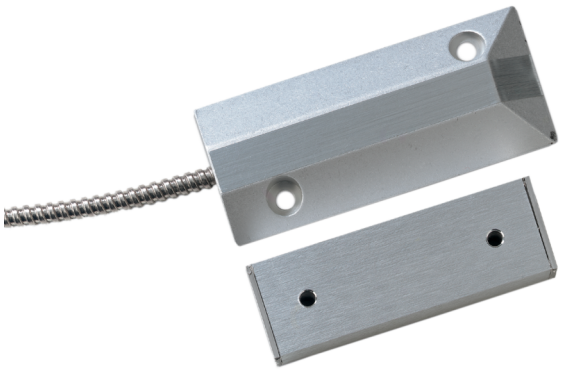

Details

- Miniature, low-profile design
- Stainless steel armoured cable for added security, reliability
- Small size less likely to be damaged by forlifts
- Tamper loop provided

DC110

Poort/overheadcont., sabo.lus, 2 m kabel, afstand van 19-63mm, wisselcont.

Technische specificaties

Algemeen


Type toepassing	Oppervlaktemontage
Type contact	CO
Aansluiting	5 wires, 2 m

Bedraad / draadloos

Bedraad / draadloos	Bekabeld
Werkingsafstand	19 mm (min.); 63 mm (max.)

Fysiek

Afmetingen magneet	76 x 25 x 12 mm
Afmetingen contact / sensor	88 x 38 x 11 mm
Materiaal	Aluminium

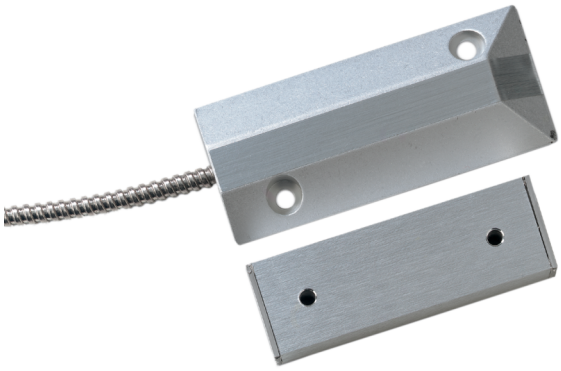

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar nl.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 18 June 2026 - 14:22