DC115


Poort/overheadcont., sabo.lus, 2 m kabel, afstand 9-62 mm, wisselcontact

Industrial contact

The DC115/DC118 are designed to be installed in commercial and industrial environments where a rugged sealed unit is required. It is ideal for metal doors, overhad doors, fences and gates. Each model features a high strength extruded aluminium housing and is completely encapsulated in an exclusive polyurethane potting compound.

Comprehensive range

The range features wide gap distances and several models to meet any application need. Armoured cable is available.

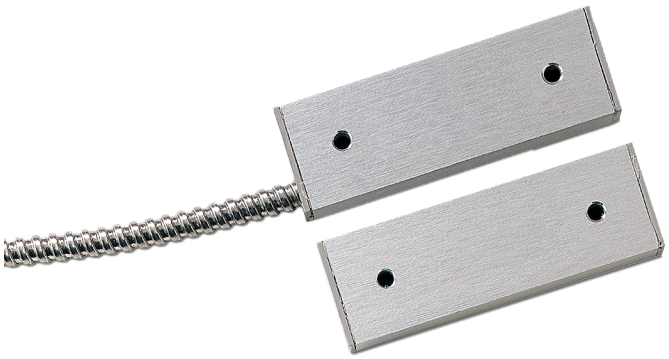

Details

- Mounting brackets available for gates, garage doors, freezers
- Rugged construction for long life
- Convenient surface mounting
- 2 m armoured cable
- Tamper loop provided
- DC115 is polarity-sensitive with reference to magnet direction

DC115

Poort/overheadcont., sabo.lus, 2 m kabel, afstand 9-62 mm, wisselcontact

Technische specificaties

Algemeen

Type toepassing	Oppervlaktemontage
Type contact	CO
Aansluiting	5 wires, 2 m

Bedraad / draadloos


Bedraad / draadloos	Bekabeld
Werkingsafstand	9 to 62 mm

Fysiek

Afmetingen magneet	76 x 12 x 25 mm
Afmetingen contact / sensor	76 x 12 x 25 mm
Kleur	Zilver
Materiaal	Geanodiseerde aluminium afwerking

Regelgeving

EN50131 Grade	Grade 2

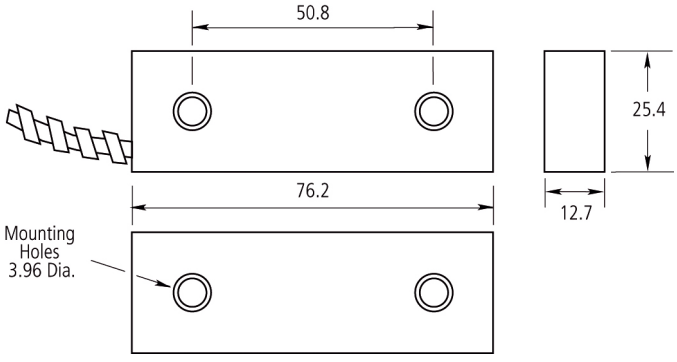

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar nl.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 18 June 2026 - 14:22