

NS2052-8P-2C

8-port PoE Unmanaged Industrial Ethernet Switch with 2 x RJ45/SFP Gigabit uplink combo ports

Overview

The IFS 8-port PoE Unmanaged Industrial Ethernet Switch provides four 10/100Mbps Ethernet ports with IEEE802.3-at PoE and one 10/100Mbps non-PoE Ethernet port.

This unmanaged switch provides plug-and-play installation with no programming required and is ideal for use in small IP systems. The switch uses an IP-30 standard metal case and can also be used in electrically harsh and climatically demanding environments. The switch accommodates either DIN-rail or wall mounting for efficient installation in multiple applications.

This switch is engineered with a high-performance switch architecture capable of providing a non-blocking switch fabric and wire-speed throughput of 5.6Gbps. With its 2K MAC address table, this switch offers wire-speed packet transfer performance without the risk of packet loss. The Flow Control function allows the switch to deliver fast and reliable IP data transfer.

This switch is ideal for applications such as IP cameras, access control, VoIP and wireless access points.



Details

- 8 RJ-45 Ports 10/100Base-TX (PoE)
- 2 RJ-45/SFP combo Ports 100/1000 (non-PoE)
- Auto MDI/MDI-X
- High Performance Architecture
- Unmanaged plug and play installation requiring no programming
- Store-and-Forward switching architecture with wire-speed filtering and forwarding rates
- Power over Ethernet (PoE)
- Up to 4 IEEE 802.3at devices powered
- Supports up to 30 watts for each PoE port
- Auto detect powered device (PD)
- Robust Hardened Design
- Provides either DIN-rail or wall-mounting
- 52 to 56VDC Operation
- Redundant power with reverse-polarity protection
- Removable terminal block for master and slave power
- Alarm relay output for power-failure alert
- Voltage/surge-suppression
- Complies with IEC60068-2-xx standards for free-fall, shock and vibration
- Wide operating temperature range of -40°C to 75°C

NS2052-8P-2C

8-port PoE Unmanaged Industrial Ethernet Switch with 2 x RJ45/SFP Gigabit uplink combo ports

Technische specificaties

Categorie

Categorie	Industrial
Management	Onbeheerd
PoE	Ja

Fysieke poorten

Aantal poorten	8
Type poort	Snel
Snelheid	Snel
PoE / PoE+	8 port PoE+
Glasvezelpoort	2 SFP
Ondersteunde SFP's	S30/S35 series

Switch prestaties

Switch fabric	5.6Gbps
Doorvoer (Mpps)	4.1
Jumbo frame ondersteuning	10 K

Layer-2 functies

Management interface	Unmanaged plug and play installation requires no programming
----------------------	--

Elektrisch

PoE-vermogensbudget	30 W (per port)
Redundante voeding	Ja
Type voeding	52 tot 56 VDC
Vermogensverbruik	244 W (Max.)

Fysiek

Fysieke afmetingen	72 x 107 x 161 mm
Netto gewicht	1034 g
Kleur	Zwart
Materiaal	Metaal
Type montage	DIN-rail, Muurmontage

Omgeving


Bedrijfstemperatuur	-40 to +75
Opslagtemperatuur	-40 to 75 °C
Relatieve vochtigheid	0 to 95% (non-condensing)
Omgeving	Binnen
IP-classificatie	IP30

Regelgeving

IEC-standaard	IEC60068-2-27 (shock), IEC60068-2-32 (free fall), IEC60068-2-6 (vibration)
---------------	--

LED Indicators

Power:	Power input 1 - Green; Power input 2 - Green
Power Fault:	Green: Normal operation - Off; Fault - Red
PoE Ports (Port-1~Port-8):	Green: LNK/ACT (10/100Mbps), Orange: PoE-In-Use
Uplink Port (Port-9~Port-10) SFP:	Green: LNK/ACT, Orange: 1000
Uplink Port (Port-9~Port-10) RJ45:	Green: LNK/ACT, Orange: 1000

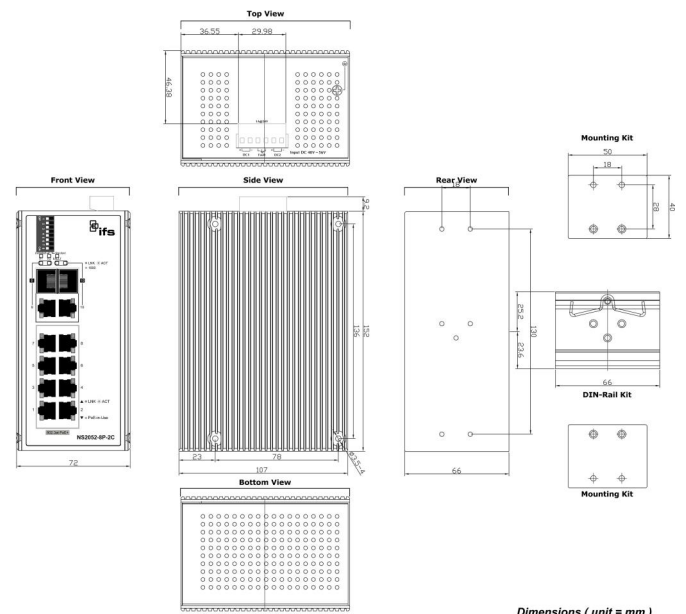

Dimensions (unit = mm)



Als een bedrijf van innovatie behoudt Carrier Fire & Security zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar nl.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 5 May 2023 - 10:27