

1X-X3-32

Conventional Fire and Extinguishing Panel - 3 Zone - French Belgian

Overview

1X fire control panels offer state of the art architecture in configurations that deliver an uncomplicated solution for small to mid-sized conventional applications. They feature an attractive contemporary design that fits with any decor. The gently curved door front offers a distinctive flair. Operator controls are inset in a striking black lexan.

With support for multiple lines of conventional detectors and accessories, these quick-to-configure systems offer versatility that benefits building owners and installation/maintenance companies alike.

The Panel

The 1X-X3 is a conventional fire alarm and extinguishing control panel. It is supplied in local language with 3 fire zones that support up to 32 devices per zone. These zones may be configured for extinguishing in single zone or double zone configuration in any combination of zones. In addition the panel offers supervised outputs for first stage notification, second stage notification as well as optical warning indicators and actuator activation. Standard relay outputs are provided for EN54 compliance and system status notification, as well as multiple inputs for system control.

Options

The panels support 2 types of auxiliary relay boards, one with 4 standard relays, and one with 4 supervised relays. With these boards the panel outputs may be expanded with up to 16 additional outputs.

Approvals & Compliance

The product line carries the following accreditations:

- EN54:2, EN54:4 and CE approved
- CPD certified
- EN12094-1 certified

- WEEE compliant
- RoHS compliant



Szczegóły

- Modern, elegant design
- Easy removable parts for quick and easy installation
- Normal & head-out supervision support per zone
- Three detection zones
- Single zone, double zone or any combination of zones configurable for release
- 6 Pre-configured relays and 8 supervised inputs for extinguishing control
- Configurable fire routing, sounder, extinguishing, reset and door monitoring delays
- Configurable "Hold Mode" type-A or type-B
- Sounders configurable for pulsing or continuous operation
- Extinguishing agent flow confirmation
- Continuous or resetable 24 VDC auxiliary supply
- Auxiliary standard & supervised relay output support
- Default support for special functions such as: - EN54 compliant user access levels - Basic & Advanced level configuration - mixed zones - front panel diagnostics with test & disable control - one-man walk test

1X-X3-32

Conventional Fire and Extinguishing Panel - 3 Zone - French Belgian

Specyfikacja techniczna

Ogólne

Dopuszczalna pojemność do 96

systemu (liczba
urządzeń)

Elektryczne

Typ zasilacza VAC

Napięcie znamionowe 110 VAC @ 50 Hz or 230 VAC @ 50 Hz (+10%
-15%)

Pobór prądu 3.15 A @ 110/1.5 A @ 240 VAC

Pełta

Dopuszczalna pojemność

pełti

Strefa

Maksymalna liczba stref do 3

Liczba urządzeń na linii 20 max.

Bateria rezerwowa

Pojemność 2 x 12V 12 Ah (SLA)

Fizyczne

Form factor Średni

Physical dimensions 440 x 480 x 140 mm (W x H x D)

Masa netto 3.9 kg (without battery)

Shipping weight 6 kg

Kolor Szary (RAL 7035)

Typ montażu Montaż nawierzchniowy

Otwory kablowe Ø 20 mm - 20 / 2 / 26 (top / bottom / rear)

Środowiskowe

Temperatura pracy -5 to +50°C

Temperatura -20 to +70°C

magazynowania

Wilgotność względna 10 to 95% noncondensing

Środowisko Wewnątrz

Szczelność IP IP30

Regulacyjnych

Zgodność CPD, RoHS, WEEE

Certification EN12094-1, EN54-13, EN54-2, EN54-4

Input Supply

Cable specification 3 x 1.5 mm² (live, neutral, earth)

Panel Supply

4A @ 24 VDC

Quiescent current (no
devices) 0.39 A

Alarm current (no
devices) 2.78 A

Zones

3

Output voltage 22 VDC (18-24 VDC)

Load (max) 65 mA

Cable resistance (max) 40 ohm

Cable capacitance (max) 500 nF

Devices per zone (max) 20

Supervised Inputs

6

Use MCP Start, MCP Hold, MCP Abort, Pressure
Switch, Gas Flow, Door Monitor

Non Supervised Inputs

2

Use Auto/Manual mode, Remote Reset

Supervised Outputs

4

Use Fire Sounders, Extinguishing Sounders, Optical
Indications, Actuator

Notification 2 x 500 mA @ 24 VDC

Visual indicators 1 x 500 mA @ 24 VDC

Actuator 1 x 1A @ 24 VDC

Non Supervised Outputs

4

Use Hold Mode, Abort Mode, Manual Mode, Release
Indication


Auxilliary Supply Output

Output voltage 24 VDC (21-28 VDC)

Load (max) 250 mA

1X-X3-32

Conventional Fire and Extinguishing Panel - 3 Zone - French Belgian

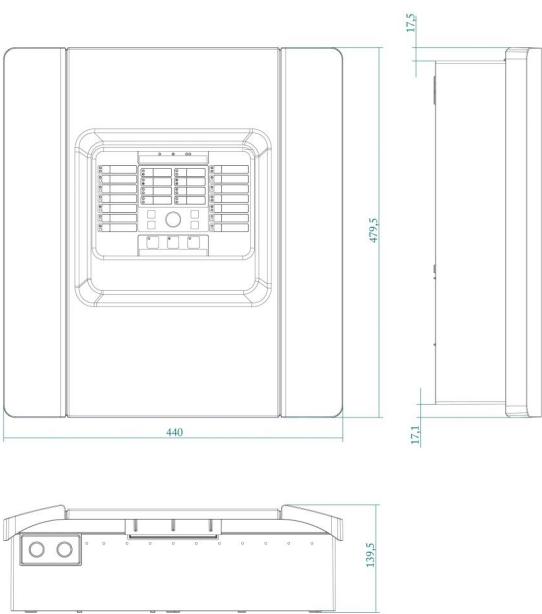

Będąc firmą innowacyjną, Carrier Fire & Security zastrzega sobie prawo do zmian w specyfikacji wyrobów bez uprzedzenia. W celu uzyskania najnowszych specyfikacji prosimy o wizytę na stronach pl.firesecurityproducts.com lub kontakt z przedstawicielem handlowym.

Last updated on 15 February 2024 - 10:16