



# ATS-IP-KIT

## Kit Comunicação IP - ATS Classic

### Product Overview

---

The ATS1809 Universal Interface (Universal Interface) acts as a gateway between an ATS MASTER alarm panel and the outside world. It includes an embedded web server to enable the installation technician to program all the necessary configuration options of the Universal Interface by means of a web browser on a computer.

The Universal Interface enables an ATS control panel to communicate with the monitoring station and/or security management systems at the same time via the Internet protocol (IP).

The ATS1801 Computer Printer interface is used to connect the ATS1809 via RS232 to the ATS MASTER panel. In addition the ATS1801 provides for an additional printer port.

### Reporting Facilities

---

With the ATS1809 you will have the full benefit of alarm reporting over IP, using SIA, XSIA or CID.


As a standard solution the Osborn Hoffmann front-end receiver will be able to receive and process the events and forward these to central station applications.

Depending on the central station individual solutions can be created to configure the receiving environment.

### LED indications of ATS1809

---

- TX — Red LED indicates RS232 data transmission to Computer and Printer Interface
- RX — Green LED indicates RS232 data reception from Computer and Printer Interface
  
- PWR — Indicates power supply.

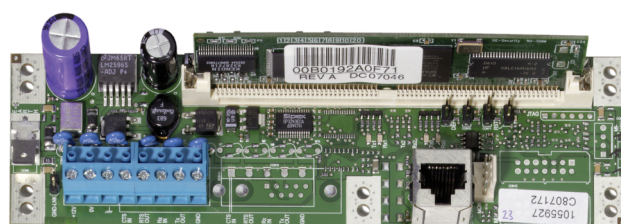

### Detalhes

---

- IP communication for ATS2000/ATS3000/ATS4000 Series
- ATS System component
- Interfaces via ATS1801 (computer interface)
- Uses SIA, XSIA and Contact ID
- Configurable using a web browser
- Static (fixed) IP addresses, No proxy
- Port number: configurable
- Low bandwidth requirements
- Small packets (typical 60-100 bytes)
- Poll rate adjustable (1- 255 seconds)
- TripleDES Encryption
- Built-in firewall
- Firmware can be upgraded via Web Browser
- Management functions implemented

# ATS-IP-KIT

## Kit Comunicação IP - ATS Classic

### Especificações técnicas

---

#### Geral

---

Linha de produto	ATS Master
Configuração	Via Web interface

---

#### Rede

---

Tipo de comunicador	IP
Encriptação	128-Bit Twofish data encryption (to management software) Triple DES encryption (to OH-Network Receiver.)

---

#### Reportar

---

Recetores suportados	Osborne Hoffman (OH)
----------------------	----------------------

---

#### Elétrica

---

Valor da fonte de alimentação	12 V DC direct from auxiliary power from ATS panel or from DGP or other 12 V DC
Consumo de corrente	80mA (ATS1809) + 25 - 150 mA (ATS1801)

---

#### Software upgrade paths

---

Upgradeable software obtainable from Interlogix.

---

#### Reporting options

---

Interlogix OH Network Receiver CID/SIA/XSIA

---

#### Reporting backup

---

PSTN dialler, ISDN or GSM backup

---

#### Typical TCP packet sizes

---

Traffic type /Direction	Total bytes
Poll /Software > panel	85
Ack, no data/Software < panel	85
Ack, COS event/Software < panel	99
Ack, SIA/CID event/Software < panel	107

---

#### Network primitive frame size

---

Ethernet frame	64-1522
IP Frame	20 + data
TCP Frame	20 + data
UDP Frame	8 + data

---

#### Backup power

---

Battery supply via ATS Panel

---

#### Onboard status indicators ATS1809

---

LED indicators for:	Power
	Ethernet link and activity
	RS232 data transmit and receive

---

#### Data connection

---

From panel to Universal Interface:	RS232 port connection from Universal interface to Port 1 connection on computer interface board if installed
	100 Mbit RJ45 Ethernet interface

---

#### Board size ATS1809

---

ATS BB Size

---

#### Data reset and refresh functions

---

CPU reset via jumper (J2).  
CPU reset via browser (Reboot CPU).  
Data reset to factory defaults via jumper (J8)  
Restart Communications via browser

---

#### Mounting of ATS1801

---

On the ATS MASTER panel

---