



# ATS7090

## Interface Comunicação WebWay One

### ATS interface for WebWayOne alarm transmission systems

---

The ATS7090 MI interface board for ATS Master, Advisor Advanced and Axon enables a digital connection with the WebWay alarm transmission systems. The total solution offers SIA alarm reporting to an ARC supporting the WebWay receiving solution and a secure transmission to remotely connect via Titan and ATS8500 to support remote configuration and diagnostics. It manages the priority for critical alarm reporting during an active remote download connection.

### About WebWayOne

---

At WebWay we use technology to make life more secure. Protecting property and people is a serious business and WebWay is a no compromise solution to monitored security. WebWay connects your premises to our secure communications network for transmitting alarms to an Alarm Receiving Centre (ARC) using modern technology and advanced security methods.

WebWayOne is an international service provider for the security industry. Our global headquarters, development, manufacturing and support are in the UK. We've provided secure communications solutions to leading retailers, banks, businesses and domestic properties in across the world.

We've brought new innovations to market using a measured quality process, making sure that the products installed operate to the highest standard, using the best technology available.

Connect to the WebWay network in your country. Visit [www.webwayworld.com](http://www.webwayworld.com) for updates.

Local language support, on line ordering, configuration and management. Mobile device optimised.

Grade 2, 3 and 4 monitoring options, independently tested to all European signalling standards.

### About WebWayOne signalling & management features

---

Simultaneously signal network faults and alarm events.

Intelligent network fault monitoring reduces false/unconfirmed alarms.

Single path, single path with backup and monitored dual path signalling options.


Roams all radio networks 3G, EDGE/GPRS services for maximum reliability.

Expandable to adapt to the needs of your location.

Order your WebWay on line or via a distributor.

Configure and manage your device on line on mobile, laptop or desktop browser. No software required.

Delivered with SIM ready. Monitoring fees only start on commissioning.

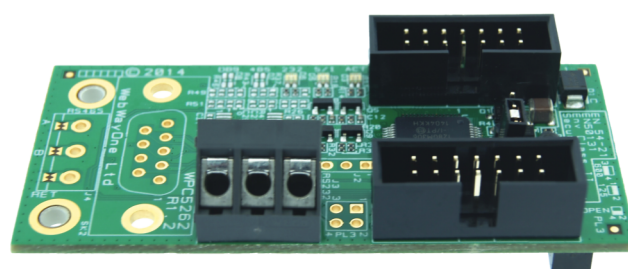

### Detalhes

---

- Connects the MI bus of the ATS Master, Advisor Advanced or Axon to your WebWay signalling device
- Supports connectivity to WebWay alarm communication systems
- Enables SIA messaging to ARC
- Secure transmission for ATS8500 and Titan
- Critical alarm priority to disconnect UDL session for ATS Master

Remotely configurable Grades, transfers, cancellations.

Remotely upgradeable WebWay software for enhancements and maintenance.

Hardware warranty extended whilst actively monitored, until obsolete or beyond repair.

## **About WebWayOne Signalling devices**

---

Communicator Pro and Mini for integrated dual path signalling.

Go Plus: Single Path IP with 3G recovery channel.

Go: Single Path IP or 3G signalling.

Pro (152 x 89 mm) and Mini (107 x 89 mm) formats.

Very low power consumption. 61 to 66 mA (Pro), 38 to 41 mA (Mini).

12 VDC example.

Fastest processor (400 Mhz) for handling multiple security applications.

Largest memory (128 MB) to store alarms, images and enhancements.

3G/EDGE/GPRS radio module and Micro SIM (roaming).

RS232, 485, TTL serial data interfaces supporting the largest range of integrations.

3 (Pro) or 1 (Mini) expansion interfaces (1 used for AT57090).

12 (Pro) or 2 (Mini) inputs including EOL and High/Low.

3 (Pro and Mini) outputs.

Additional plug on modules for Modem Capture, RS232 data applications and audio.

Remotely upgradeable to keep up to date.

Uses Advanced Encryption Standards (128) with keys changed every 24 hours.

# ATS7090

## Interface Comunicação WebWay One

### Especificações técnicas

---

#### Geral

Linha de produto	Advisor Advanced, ATS Master, Axon
------------------	------------------------------------

---

#### Rede

Tipo de comunicador	Móvel, IP
---------------------	-----------

---

#### Reportar

Recetores suportados	WebWayOne
----------------------	-----------

---

#### Elétrica

Tensão de operação	25 mA (standby) 150 mA (both ports active)
--------------------	---

---

#### Físico

Dimensões físicas	90 x 86 mm
-------------------	------------

---

#### Ambiental

Temperatura de operação	0 to +50°C
-------------------------	------------

---

Humidade relativa	95% noncondensing
-------------------	-------------------

---