



ATS7320

Interface Comunicação GSM/GPRS - ATS

Communication devices

The ATS Master and Advisor Advanced features a true communication centre offering multiple reporting connections to multiple central stations. Control panels having an IP, PSTN communicator on board and optional ISDN, GSM, IP communication modules, where the ATS7320 can be used as a backup or primary reporting channel. It is scalable with back-up reporting options according your needs.

Product overview

The ATS7320 GSM module is directly connected to the ATS Master and Advisor Advanced panel and fully enables alarm reporting and up- and downloading to ATS85XX via GPRS.

All reporting formats available through PSTN are available via GSM, including voice reporting or audio listen-in.

The GSM module can be used for primary reporting as well as back-up reporting (using multiple central stations).

Up / downloading


Besides the very good reporting facilities, the ATS7320 can establish a GPRS connection for up- and downloading when connected to the Advisor Advanced. Dual band 900 / 1800 MHz is standard available. Especially for densely populated areas like big cities where many small cells are used with shorter receiving distances you will have the benefit of the 1800 MHz band.

For convenience 4 status LED's are permanently indicating:

- [] Communication between the panel
- [] Status of the audio & GPRS information transmitted to the central station
- [] Field strength or signal strength found by the GSM module
- [] General status of the GSM module (network presence, power etc.)

SMS reporting & command/control

The ATS7320 support SMS functionality when connected to the Advisor Advanced panels. When connected together the system can send localized SMS messages to any mobile phone configured in the panel. Besides receiving an SMS the end user can send SMS messages back to the Advisor Advanced as a command. He can check the status of the system, trigger and output and much more.

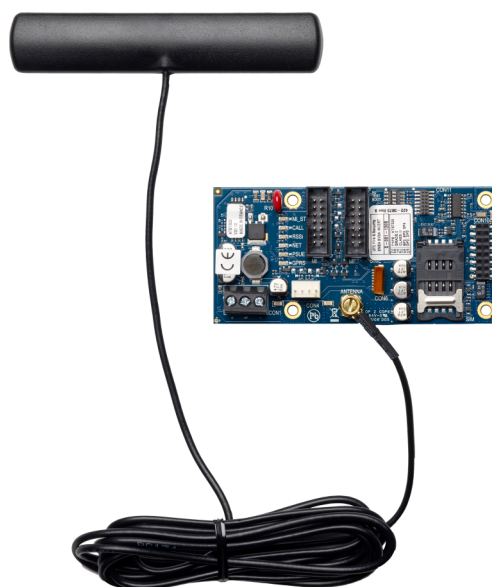

Detalhes

- Full alarm reporting via GSM
- All popular reporting formats available, including voice reporting and audio listen-in
- Perfectly suitable for primary reporting in case a PSTN or ISDN line or IP connection is not available
- Back-up reporting easily configurable via multiple central stations
- Data connection for Up/Download when connected to Advisor Advanced
- Unique 4800 Baud data connection for U/D
- Dual Band 900 / 1800 MHz
- Six status LED's for Diagnostics
- GSM Antenna included
- SMS Reporting on Advisor Advanced
- SMS Command & Control on Advisor Advanced

ATS7320

Interface Comunicação GSM/GPRS - ATS

Especificações técnicas

Geral

Linha de produto	Advisor Advanced, ATS Master
------------------	------------------------------

Rede

Tipo de comunicador	2G, Móvel
Frequência GSM	900/1800 MHz (Dual band)

Reportar

Recetores suportados	Osborne Hoffman (OH), Receptores RTPC (PSTN)
----------------------	--

Interfaces

Antena	Sim, incluído
--------	---------------

Elétrica

Tensão de operação	10 to 15 VDC
Consumo de corrente	20 mA (idle) 40 mA (GSM online) 340 mA (GSM max.)

Físico

Dimensões físicas	104 x 50 mm
Peso líquido	44 g

Ambiental

Temperatura de operação	-10 to +55°C
Humidade relativa	Max. 95% noncondensing
Ambiente	EN50130-5; Classe II - Interior (geral)

Regulamentação

Certificação	EN50131 Grau 3
--------------	----------------
