

TVC-2401

Câmara Box HD-TVI 1080p - TruVision

Overview

The new TruVision line includes a comprehensive family of HD-TVI cameras for stand-alone or integrated installations, designed for optimal image quality over existing coaxial cable.

Ideal for improving video quality of existing analog surveillance system installations ranging from convenience stores to retail mall parking lots, the TruVision HD-TVI line has the right cameras for your new or existing project and can help you stay within budget constraints without compromising security needs.

The cameras have true day/night capabilities, providing color images by day and black-and-white images under IR operation in low light applications. TruVision HD-TVI cameras are available with either fixed lens or varifocal lens or motorized lens.

Form factors include box, dome, and traditional bullet cameras. Bullet models offer a familiar form factor that features a pre-installed wall mount with cable management. Bullet and domes are IP66 rated for outdoor installation and selected dome models are available with an IK10 vandal-rated enclosure.

All TruVision HD-TVI cameras are designed to install quickly and easily, right out of the box, so you can be up and running in no time.

Installation

The bullet and dome provide motorized lens control which facilitates installation and image adjustment. From the TVR12HD/44HD the installer can remotely control the focal length and precisely adjust the camera focus, simplifying both installation and maintenance.



Detalhes

- 1080p HD resolution
- HD-TVI technology for transmitting HD quality video over existing coax cable
- True day/night functionality
- Wide dynamic range
- Smart focus
- Dual power 12 VDC / 24 VAC
- Provide OSD control via TruVision up the coax and built-in menu button

TVC-2401

Câmara Box HD-TVI 1080p - TruVision

Especificações técnicas

Geral	
Tecnologia	HD-TVI analógico
Video standard	PAL

Câmara	
Dimensão do sensor	1/3"
Resolução máx	1080p
Varredura do sensor	Progressivo
Tipo de sensor	CMOS
Total Pixels (H x V)	1920 x 1080
Pixéis efetivos (H x V)	1920 x 1080
Relação S/N digital	More than 52 dB
Tempo de obturador	1/25 to 1/50,000 s

Desempenho de iluminação	
Tipo WDR	True WDR
WDR	120 dB
Redução digital de ruído	3D DNR
Dia / noite	True Day/Night
Filtro IR motorizado	Sim
Sensibilidade de cor	0.01 Lux @ (F1.2, AGC ON), 0.014 Lux @ (F1.4, AGC ON)
Infravermelho (IR)	Não

Codificação	
Compressão de stream principal	H.264
Compressão sub stream	H.264, MJPEG

Lente	
Tipo de montagem de lente	C/CS (auto iris)

Rede	
Integração	CGI, ONVIF, PSIA


Elétrica	
Tipo de fonte de alimentação	VAC
Power supply value	12 VDC / 24 VAC
Consumo de energia	12 VDC: max. 6 W
Consumo de corrente	12 VDC: max. 0.5A

Físico	
Dimensões físicas	69.2 x 57.3 x 148.7 mm 2.72 x 2.56 x 5.85 in.
Peso líquido	520 g 1.15 lbs.
Fator de Forma	Caixa

Ambiental	
À prova de vandalismo	No
Ambiente	Interior
Temperatura de operação	-30 to 60°C -22 to +140°F
Temperatura de armazenamento	-20 to +70°C -4 to +158°F

Regulamentação	
Conformidade	C-tick, CE, FCC, REACH, RoHS, UL, WEEE

Kamera	
Sync. system	Internal
Video output	Dual HD-TVI or 960H
OSD	Built-in OSD button, TruVision Coax OSD control on both HD-TVI and 960H

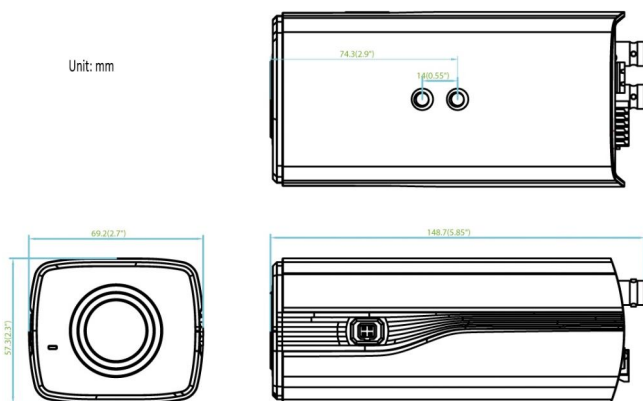

Como empresa de inovação, a Carrier Fire & Security reserva o direito de alterar as especificações do produto sem aviso prévio. Para obter informações sobre as especificações mais recentes do produto, visite pt.firesecurityproducts.com online ou contate o departamento comercial.