

TVM-4002

Monitor TruVision LED 40", 16:9 Full HD com Áudio- Entradas HDMI/VGA/BNC, Áudio

Overview

The LED TVM range of monitors is the latest advancement in TruVision monitors. Providing superior image quality through HDMI, VGA and BNC connections, these monitors are a great fit for today's demanding video surveillance market.

Whether displaying analog or IP resolutions, these monitors are designed to provide top image quality paired with industrial reliability.

These monitors are designed to perform 24/7 and are design with security applications in mind.

Capabilities

The TVM-4002 is a 40" class monitor, offering HDMI, VGA and BNC connections. The monitor has two built in speakers and is provided with VESA wall mount holes, making them easy to combine with a variety of TruVision mounting accessories. The on screen display allows for full control of images settings such as brightness, contrast and colour temperature.



Detalhes

- 40" LED Backlight
- Full HD resolution
- 16:9 aspect ratio
- 1920 x 1080 recommended resolution
- 5,000:1 contrast ratio for crisp images
- 3D comb filter for optimal image quality
- Multiple inputs including BNC, VGA, HDMI
- BNC analog input


$\begin{tabular}{ll} TVM-4002 \\ Monitor\ TruVision\ LED\ 40",\ 16:9\ Full\ HD\ com\ \'Audio-\ Entradas\ HDMI/VGA/BNC,\ \'Audio\ \end{tabular}$

Especificações técnicas

Geral		
Technology	LED	
VESA compatibility	100 x 100 mm	
Filter type	3D Combfilter, Deinterlace	
Acessórios incluídos	Manual, Cabo Alimentação, Controlo Remoto	
Panel lamp life	30,000 hours	
Exibição		
Screen size	39.5"	
Aspect ratio	16:9	
Taxa de contraste	5.000:1	
Viewing angle (H/V)	178° / 178°	
Response time	8ms	
Brilho	360 cd/m² (typ)	
Standards de vídeo	Deteção Auto NTSC/PAL	
compativeis	Deteguo Auto MISOFIAE	
Recommended	1920 x 1080 @ 60 HZ	
resolution		
Áudio		
Speaker power	2W x 2	
Speakers	Built-in	
Interface		
I/O Vídeo BNC	1/1	
Entrada vídeo VGA	Yes	
HDMI video in	1	
RCA audio in	1	
Entrada stereo PC	Yes	
Audio out	No	
Operações		
Controls	Power, Up/Down, Left/Right, Source, OSD Menu	
OSD	English, French, Spanish, German, Italian, Portuguese, Netherlands, Russian, Turkish, Polish	
Suporte controlo remoto	Yes	
Elétrica		
Power supply type	100 a 240 VAC	
Power consumption	<60W	
Físico		
Physical dimensions	907mm x 610 mm x 245mm	
Net weight	11 kg	
Shipping weight	13.8 kg	
Colour	Preto	
Housing Type	Plástico	
Ambiental		
Operating temperature	0 to 40°C	
Storage temperature	-20 to 60°C	
Relative humidity	10 to 85%	
Ambiente	Interior	

Reg	ula	me	nta	çãc
-----	-----	----	-----	-----

COH	formidade	CE

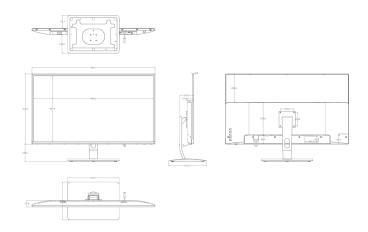



Interior

Ambiente

Como empresa de inovação, a Carrier Fire & Security reserva o direito de alterar as especificações do produto sem aviso prévio. Para obter informações sobre as especificações mais recentes do produto, visite pt.firesecurityproducts.com online ou contate o departamento comercial.