

TVN-2208S-2T

Gravador Vídeo de Rede, H.265, 8 canais IP, Switch PoE, Armazenamento 2TB - TruVision Série NVR 22

Product overview

TruVision NVR 22S (TVN 22S) is a robust high performance H.264/H.265 network video recorder with 8 or 16 embedded plug & play PoE ports.

With a total bandwidth of 80/160 Mbps available, the TVN 22S is able to connect up to 8/16 IP cameras and provide real time recording (25/30 fps) at Full HD 1080p resolution on all channels simultaneously. With its fully flexible bandwidth allocation, the TVN 22S allows recording resolutions up to 8MP at various frame rates.

Plug-&-play functionality

Setting up TVN 22S is easy. Its embedded PoE ports allow you to connect TruVision IP cameras as they were analog cameras. When plugged in, cameras are automatically assigned IP addresses, added to the recorder and set up at default configuration. Each IP camera can also be set up individually to ensure full flexibility.

The fully flexible PoE allocation feature ensures an optimally efficient use of the PoE power available.

Ease of use

TVN 22S allows users full flexibility in the way they want to configure, manage and monitor their video surveillance solution. In addition to management of the unit through its browser interface or TruVision Navigator, the TVN 22S allows users to also operate the recorder locally using its front panel controls, local VGA or HDMI outputs and its intuitive on screen display.

H.265

The TVN 22S is supporting both H.264 and H.265 compression techniques. The H.265 compression is the next evolution of video encoding. Using H.265 will result in a reduced file size for the same video content and a reduced transmission bandwidth compared to H.264. This means that for the same storage capacity more video can be stored when using H.265 than H.264 encoding. To use the H.265 encoding in the TVN 22S, TruVision H.265 cameras need to be used.


Recording performance

The maximum on-board storage capacity for the TVN 22S is 24TB, using four six TB hard drives. The hard drives can be accessed via the lockable front panel door, allowing customers to easily expand storage as their system and/or requirements grow. Recording options include continuous, event and alarm. The three modes can be combined, to ensure that the most efficient recording is possible.

Basic intrusion integration

TVN 22 has an alarmreceiver module embedded inside. The alarm message receiver can connect to up to three Interlogix IP intrusion panels that report in SIA or XSIA format.

Alarm messages, disarming and arming messages can be send from



Detalhes

- Linux embedded Plug and Play configuration
- Up to 80 Mbps camera recording bandwidth
- Up to 8 IP channels
- Up to 8 embedded PoE camera ports
- PoE-af & PoE-at support
- Up to 24TB embedded storage (4x 6TB)
- Flip-open front panel for easy HDD access, servicing and expansion
- New icon based front panel
- Real time Full HD recording
- Motion detection, VCA, privacy masking, tamper detection
- TruVision IP camera auto-detection
- Third party camera support via ONVIF and PSIA
- IP camera configuration import/export
- Custom protocol configuration (RTSP streaming)
- Integration of Carrier IP intrusion panels via SIA/XSIA reporting
- Recorder failover functionality (one failover unit per 4 operational recorders)
- TVK-800 IP Keypad support (No display of H.265 cameras possible on LCD display)
- USB DVD burner support
- Full browser-, OSD- and software-based access for live, recorded & configuration
- TVRmobile app for iOS and Android
- TruVision Navigator license-free client/host or standalone application
- TVRmobile app for Android and iOS

the alarm panel to the recorder, which then can take actions (trigger alarm recording, send a PTZ to a preset, run a shadow tour or preset tour, trigger an alarm output or send a notification message to TVRmobile). Also the heartbeat message between panel and recorder is monitored. This solution offers straightforward alarm verification and is free of charge.

TVN-2208S-2T

Gravador Víde de Rede, H.265, 8 canais IP, Switch PoE, Armazenamento 2TB - TruVision Série NVR 22

Especificações técnicas

Geral	
Tecnologia	IP
Montável em rack	Sim
Dimensão empilhamento em rack	1.5 U
Ventoinha removível	Não
Fonte de alimentação redundante	Não

Entrada vídeo/áudio	
Canais de câmaras	8
Canais Câmaras IP	8
Largura de banda máx. por canal	16 Mbps
Largura de banda de câmara	80 Mbps
Entradas máx. áudio IP	8
Standards de compressão de vídeo suportados	H.264, H.265, MPEG-4
Standards de streaming de vídeo suportados	Onvif, PSIA, RTSP, RTSP Custom Protocols

Visualização local	
Saída HDMI	1
Versão HDMI	2.0
Saída VGA	1
Saída BNC	1
Resolução máx. de saída local	4K
OSD reprodução síncrona (canais)	Up to 8 channels
OSD reprodução inversa (canais)	1

Visualização remota	
Total disponível de largura de banda de visualização	256 Mbps
Máx. de streams ao vivo	128
Máx. de stream em reprodução	128
Resolução máx. de navegador em reprodução	8 MP
Rreproduções máx. em simultâneo no navegador	Max. 16 tiles (4x4)
Navegador reprodução inversa (canais)	Up to 9 channels, depending on PC performance
Compatibilidade de software	Advisor Manager, TruVision Navigator, TVRmobile, Web Browser
Compatibilidade de navegador	Google Chrome, Internet Explorer, Mozilla Firefox, Safari

Armazenamento	
Capacidade de armazenamento	2 TB
Interfaces SATA	4
Capacidade máx. por HDD SATA (TB)	6
Resolução máxima de gravação	12 MPX
Modos de gravação	Alarme, Evento, Manual, Time-lapse high, Time-lapse low
Armazenamento externo eSATA, NAS, SAN	
Redundância de discos rígidos	Não
Agrupamento de discos rígidos	Não
Extensão SAS	Não
Abertura flip-over da frente do painel	Não
Arquivo automático	Sim
Gravador de reposição	Sim
Gravação Edge failover	Sim

Em rede	
Cartas de interface de rede (NIC)	1
Tipo de NIC	RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
Portos de rede por NIC	1
Portos PoE	8
Budget total PoE	200 W
Standards PoE suportados	PoE-af, PoE-at
Suporte PoE Plug & Play	Sim
Alocação PoE flexível	Sim
Suporte DNS	DDNS, ezDDNS, Não-IP
Suporte HTTPS	Sim

Interfaces externos	
Interface USB traseiro	1
Interface USB frontal	2
Interface série	RS-232
Entradas de alarme	16
Saídas de alarme	4
Saídas máx. áudio analógico	1

Elétrica	
Tipo de fonte de alimentação	100 a 240 VAC
Consumo sem HDD (W)	20 W (without enabling PoE)

Físico	
Dimensões físicas	442 x 371 x 74 mm (W x D x H)
Cor	Preto

TVN-2208S-2T



Gravador Víde de Rede, H.265, 8 canais IP, Switch PoE, Armazenamento 2TB - TruVision
Série NVR 22

Ambiental

Temperatura de operação	-10 to +55°C 14 to 131°F
Humidade relativa	10 to 90%

Regulamentação

Conformidade	CE, REACH, RoHS, UL
--------------	---------------------

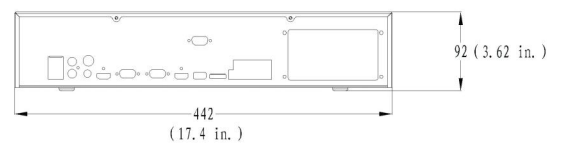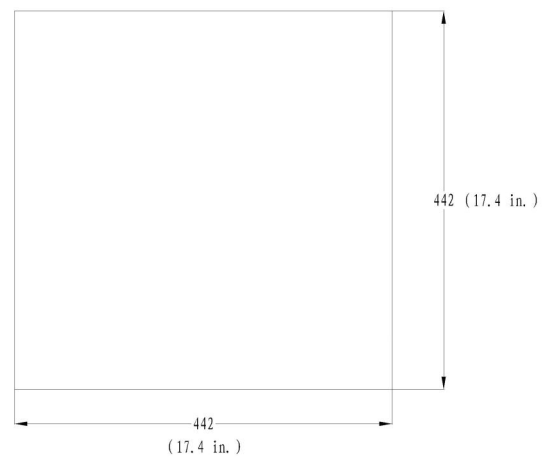

Como empresa de inovação, a Carrier Fire & Security reserva o direito de alterar as especificações do produto sem aviso prévio. Para obter informações sobre as especificações mais recentes do produto, visite pt.firesecurityproducts.com online ou contate o departamento comercial.

Last updated on 18 April 2024 - 16:52