

# TVN-2232P-8T

## Gravador Vídeo de Rede, H.265, 32 canais IP, Armazenamento 8TB - TruVision Série NVR 22P

### Overview

TruVision NVR 22P (TVN 22) is a robust high performance H.264/H.265 network video recorder. With a total bandwidth of 256 Mbps (16-channel) or 320Mbps (32- and 64 channel) available, the TVN 22P is able to connect up to 16/32/64 IP cameras and provide real time recording (25/30 fps) at Full HD 1080p resolution on all channels simultaneously. With its fully flexible bandwidth allocation, the TVN 22P allows recording resolutions up to 8MPX at various frame rates.

### Ease of use

TVN 22P was designed to make system configuration and overall use easier for both the installer and end-users through features such as: ezDDNS, start-up wizards, plug & play hard drives, auto discovery of natively supported cameras and is fully compatible with TruVision Navigator (as of 6.0SP1) and TVRmobile.

### H.265

The TVN 22P is supporting both H.264 and H.265 compression techniques. The H.265 compression is the next evolution of video encoding. Using H.265 will result in a reduced file size for the same video content and a reduced transmission bandwidth compared to H.264. This means that for the same storage capacity more video can be stored when using H.265 than H.264 encoding. To use the H.265 encoding in the TVN 22, TruVision H.265 cameras need to be used.

### Ease of use

Thanks to its 2U housing, the maximum on-board storage capacity for the TVN 2232P is 64 TB, using eight 8 TB hard drives. The hard drives can be accessed via the lockable front panel door, allowing customers to easily expand storage as their system and/or requirements grow. Additionally, TVN 22P supports RAID 0,1, 5, 6 and 10 for storage redundancy. The supported RAID levels depend on the number on hard drives. Recording options include continuous, event and alarm. The three modes can be combined, to ensure that the most efficient recording is possible.

### Basic intrusion integration

TVN 22P has an alarmreceiver module embedded inside. The alarm message receiver can connect to up to three Interlogix IP intrusion panels that report in SIA or XSIA format.

Alarm messages, disarming and arming messages can be send from the alarm panel to the recorder, which then can take actions (trigger alarm recording, send a PTZ to a preset, run a shadow tour or preset tour, trigger an alarm output or send a notification message to TVRmobile). Also the heartbeat message between panel and recorder is monitored. This solution offers straightforward alarm verification and is free of charge.



### Detalhes

- Linux embedded Plug and Play configuration
- Up to 320 Mbps camera recording bandwidth
- Up to 32 IP channels
- Up to 64TB embedded storage (8x 64TB)
- RAID 0, 1, 5, 6, 10 support (depending on the number of HDDs used)
- Flip-open front panel for easy HDD access, servicing and expansion
- New icon based front panel
- Real time Full HD recording
- Motion detection, VCA, privacy masking, tamper detection
- TruVision IP camera auto-discovery
- Third party camera support via ONVIF and PSIA
- IP camera configuration import/export
- Custom protocol configuration (RTSP streaming)
- Network redundancy
- Integration of Carrier IP intrusion panels via SIA/XSIA reporting
- Recorder failover functionality (one failover unit per 4 operational recorders)
- TVK-800 IP Keypad support (no support for local display of H.265 cameras)
- USB DVD burner support
- Full browser-, OSD- and software-based access for live, recorded & configuration
- TVRmobile app for iOS and Android
- TruVision Navigator license-free client/host or standalone application

# TVN-2232P-8T

Gravador Víde de Rede, H.265, 32 canais IP, Armazenamento 8TB - TruVision Série NVR 22P

## Especificações técnicas

Geral	
Tecnologia	IP
Montável em rack	Sim
Dimensão empilhamento em rack	2 U
Ventoinha removível	Não
Fonte de alimentação redundante	Não

Entrada vídeo/áudio	
Canais de câmaras	32
Canais Câmaras IP	32
Largura de banda máx. por canal	16 Mbps
Largura de banda de câmara	320 Mbps
Entradas máx. áudio IP	32
Entradas máx. áudio analógico	1-ch, RCA ( 2.0 Vp-p, 1 kohm )
Standards de compressão de vídeo suportados	H.264, H.265, MPEG-4
Standards de streaming de vídeo suportados	Onvif, PSIA, RTSP, RTSP Custom Protocols

Visualização local	
Saída HDMI	2
Versão HDMI	2.0
Saída VGA	2
Saída BNC	1
Resolução máx. de saída local	4K
OSD reprodução síncrona (canais)	Up to 16 channels
OSD reprodução inversa (canais)	1

Visualização remota	
Total disponível de largura de banda de visualização	256 Mbps
Máx. de streams ao vivo	128
Máx. de stream em reprodução	128
Resolução máx. de navegador em reprodução	8 MPX
Rreproduções máx. em simultâneo no navegador	Max. 16 tiles (4x4)
Navegador reprodução inversa (canais)	Up to 9 channels, depending on PC performance
Compatibilidade de software	Advisor Manager, TruVision Navigator, TVRmobile, Web Browser
Compatibilidade de navegador	Google Chrome, Internet Explorer, Mozilla Firefox, Safari

Armazenamento	
Capacidade de armazenamento	8 TB
Interfaces SATA	8
Capacidade máx. por HDD SATA (TB)	8
Resolução máxima de gravação	12 MPX
Modos de gravação	Alarme, Evento, Manual, Time-lapse high, Time-lapse low
Armazenamento externo	eSATA, NAS, SAN
Níveis RAID suportados	RAID 0, RAID 1, RAID 10, RAID 5, RAID 6
Redundância de discos rígidos	Sim
Agrupamento de discos rígidos	Sim
Extensão SAS	Não
Abertura flip-over da frente do painel	Sim
Arquivo automático	Sim
Gravador de reposição	Sim
Gravação Edge failover	Sim

Em rede	
Cartas de interface de rede (NIC)	2
Tipo de NIC	RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
Modo NIC	Redundância de Rede
Portos de rede por NIC	1
Suporte DNS	DDNS, ezDDNS, Não-IP
Suporte HTTPS	Sim

Interfaces externos	
Interface USB traseiro	1
Interface USB frontal	2
Interface série	RS-232
Entradas de alarme	16
Saídas de alarme	4
Saídas máx. áudio analógico	1

Elétrica	
Tipo de fonte de alimentação	100 a 240 VAC
Consumo sem HDD (W)	<=30 W

Físico	
Dimensões físicas	442 x 442 x 92 mm (W x D x H)
Cor	Preto



Ambiental	
Temperatura de operação	-10 to +55°C (14 °F to 131 °F)
Humidade relativa	10 to 90%

# TVN-2232P-8T

Gravador Víde de Rede, H.265, 32 canais IP, Armazenamento 8TB - TruVision Série NVR 22P

## Regulamentação

Conformidade CE, REACH, RoHS, UL

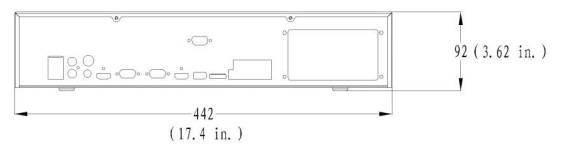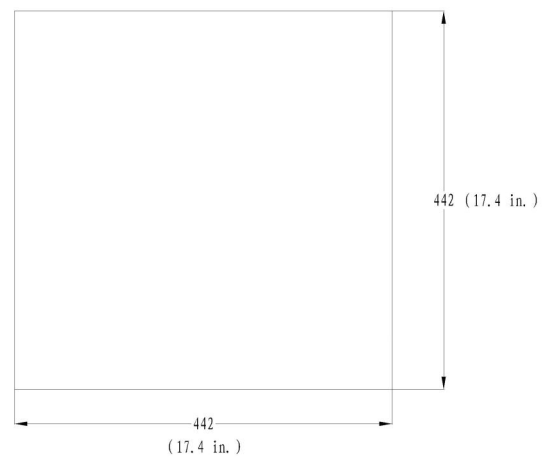

Como empresa de inovação, a Carrier Fire & Security reserva o direito de alterar as especificações do produto sem aviso prévio. Para obter informações sobre as especificações mais recentes do produto, visite [pt.firesecurityproducts.com](http://pt.firesecurityproducts.com) online ou contate o departamento comercial.

Last updated on 26 August 2024 - 15:40