


# 2010-2-UC240-KIT

**UC240 Kit FÖR BRANDLARM (incl. enclosure, IO cable w/ EOL, serial cable accessories) for fire panel, UltraSync communicator with IP and 4G/2G dual path suitable**

## Overview

UC240 UltraSync communicator is a dual path alarm signalling unit for transmitting alarm signals from a customer's alarm panel to a Central Monitoring Stations (CMS). The monitoring path is based on IP and SIM 4G/2G mobile technology. The unit is designed for use in both security and fire systems.

- Dual-path monitoring for low, medium and high risk sites, covering intruder applications, fire and more.
- These monitored alarm signalling devices are small enough to fit inside most alarm panels. They use two signalling paths – if the primary path is down, the secondary path kicks in. And if that happens, the secondary path will use the primary path reporting and polling times.
- The primary path uses IP technology to send alarm signals over the customer's network or broadband hub.
- The secondary path uses 4G or 2G mobile connectivity – with dual SIMs for extra resilience.
- EN50131 Grade 3 and EN50136 certified for intrusion systems.
- EN54-21 certified for fire alarm systems.

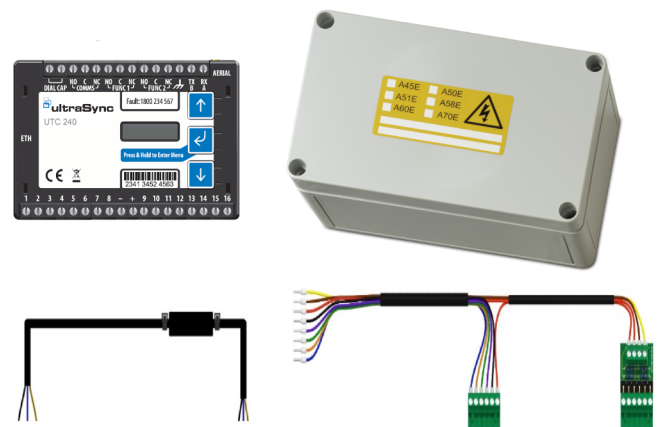

## Alarm panel interfaces

- 16 general purpose alarm inputs (Logic High = +2 to +30 V / Logic Low = <1.3 V)
- 3 relay outputs
- Unconnected state: Logic Low
- Standard screw terminals
- Programmable function output-for remote control of site devices
- Line fault output-for status indication at site of alarm signalling path
- Dial Capture with phone line simulation
- Onboard RS232 or RS485 for direct panel interface to some panels

## Dial Capture features

- Converts dialler alarm systems into high security signalling devices
- Alarm panel interface supports: Ademco Contact ID, Ademco Hi Speed, Ademco 4+1, Ademco 4+2, SIA 1/2/3

## Configuration

- Simple single push button pin learn
- iOS and Android installer app
- Using on board menu driven by push buttons

# 2010-2-UC240-KIT

UC240 Kit FÖR BRANDLARM (incl. enclosure, IO cable w/ EOL, serial cable accessories) for fire panel, UltraSync communicator with IP and 4G/2G dual path suitable

## Tekniska specifikationer

---

### Allmänt

|              |           |
|--------------|-----------|
| Produktlinje | UltraSync |
|--------------|-----------|

---

### Nätverk

|                 |  |
|-----------------|--|
| Kommunikatortyp | 2G, 4G, Cellular, IP   |
| GSM-frekvens    | LTE: Penta-Band 700 (Bd28) / 800 (Bd20) / 900 (Bd8) / 1800 (Bd3) / 2100 MHz (Bd1) + GPRS<br>Dual band (900/1800 MHz) |

---

### Rapportering

|                        |                 |
|------------------------|-----------------|
| Rapporteringsprotokoll | Contact ID, SIA |
| Mottagare som stöds    | UltraSync       |

---

### Gränssnitt

|          |                                    |
|----------|------------------------------------|
| Ethernet | RJ-45 1000 Mbps Ethernet Interface |
| Antenn   | Yes, included                      |

---

### Ingång / utgång

|          |                                 |
|----------|---------------------------------|
| Ingångar | 16 general purpose alarm inputs |
| Utgångar | 3 relay outputs                 |

---

### Elektrisk

|                     |   |
|---------------------|---|
| Driftspänning       | 9.5 to 30 VDC   |
| Current consumption | 85mA @12 VDC, 185mA @24 VDC (Maximum loading)<br>45mA @12 VDC, 100mA @24 VDC (Normal operation) |

---

### Fysisk

|                     |                 |
|---------------------|-----------------|
| Fysiska dimensioner | 95 x 67 x 17 mm |
| Färg                | Svart           |

---

### Miljö

|                       |  |
|-----------------------|--|
| Driftstemperatur      | -10 to +55°C                             |
| Relativ luftfuktighet | 5 to 75%                                 |
| Miljö                 | EN50130-5 ; Klass II - Inomhus (allmänt) |

---

### Reglerande

|           |                                   |
|-----------|-----------------------------------|
| Intygande | EN50131 Grade 3, EN50136, EN54-21 |
|-----------|-----------------------------------|

---



Carrier Fire & Security förbehåller sig rätten att ändra produktspecifikationer utan föregående meddelande. För de senaste produktspecifikationerna, besök [se.firesecurityproducts.com](http://se.firesecurityproducts.com) online eller kontakta din försäljningsrepresentant.

Last updated on 9 December 2024 - 11:16