

TVB-5412

TruVision ANPR camera, H.264, 1080p, 2.8-12mm, Super L Light WDR, true D/N, 50m IR, Audio, Alarm, BNC, micro SD/SHDC slot, Intelligence, PoE+ (802.3-at) /12VDC, IP66

Overview

The TruVision Automatic Number Plate Recognition (ANPR) cameras feature embedded Optical Character Recognition (OCR) to identify vehicle license plate information in real-time. Captured license plates can trigger events that can be used to store video and snapshots or sent events over the network. These events contain information like license plate characters, date & timestamp, lane number, direction, etc.

Wiegand interface

The onboard Wiegand interface allows the camera to be connected to any access control system with Wiegand reader interface. Every license plate stored in the camera database can have a corresponding badge ID that is sent via the camera Wiegand output to the access control system whenever the license plate is read.

Standalone solution

In standalone operation where the camera is used to grant access to vehicles, the license plates stored in the camera database can be configured as white or black listed. Actions like activating the camera output to open a gate for white listed vehicles can be configured in the camera. Black listed or non-listed vehicles can also trigger additional actions or events.

Without matching vehicle license plates against a database, the camera is also able to store any captured license plate on local storage, NAS or FTP server.

Integrated solution

When the camera is connected to an access control system, the access control system can grant or deny access to the vehicle based on the badge ID that is sent by the camera whenever the license plate is captured. Access Control system parameters like access levels, time schedules or other logic can be used to grant access to specific vehicles according to pre-defined time schedules. The video streams from the camera can also be recorded on any TruVision network recorder or any VMS supporting recent TruVision IP cameras.



Detaljer

- Automatic Number Plate Recognition (ANPR)
- Wiegand interface for integration with access control systems
- Motorized Lens 2.8 to 12mm
- Up to 50 m IR illumination
- Super Low Light: Color: 0.002 Lux @ (F1.2, AGC ON), 0 Lux IR on
- Maximum Real Time Resolution: 1920 x 1080 @ 50 fps
- Motorized IR Cut Filter
- ONVIF Profile G and S conformant
- H.264 compression with triple-streaming functionality
- Edge recording up to 128GB with optional SDHC card
- Up to 120 dB Wide Dynamic Range

TVB-5412

TruVision ANPR camera, H.264, 1080p, 2.8-12mm, Super L Light WDR, true D/N, 50m IR, Audio, Alarm, BNC, micro SD/SHDC slot, Intelligence, PoE+ (802.3-at) /12VDC, IP66

Tekniska specifikationer

Allmänt

Teknik	IP
Videostandard	NTSC, PAL
Image settings	Hallway View, Mirror
Videoutgång	BNC Composite PAL / NTSC
Programvarukompatibilitet	Advisor Management Software (ATS8600), et
	TruVision Navigator, TVRmobile, Web Browser

Kamera

Sensorstorlek	1/1.8"
Max. upplösning	2 MP
Sensorsökning	Progressive
Sensortyp	CMOS
Totalt antal pixlar (H x V)	1920 x 1080
Digital S/N ratio	52 dB (AGC OFF)
Slutartid	1 to 1/100,000 s

Ljusprestanda

WDR-typ	True WDR
WDR	120 dB
Digital brusreducering	3D DNR
Dag natt	True Day/Night
Motoriserat IR-skärfilter	Ja
Färgkänslighet	Color: 0.002 Lux @ (F1.2, AGC ON), 0.0027 Lux @ (F1.4, AGC ON), 0 Lux with IR
IR-intervall	Up to 50 m

Kodning

Videoströmmar	3
Huvudströmskomprimering	H.264, MPEG4
Subströmskomprimering	H.264, MJPEG, MPEG4
Tredje strömskomprimering	H.264, MJPEG, MPEG4
Video bitrate	32 Kbps to 16 Mbps
Huvudströmupplösningar	1280 x 720 (XVGA), 1280 x 960 (720p), 1920 x 1080 (1080p)
Subströmupplösningar	352 x 288 (CIF), 640 x 480 (VGA), 704 x 576 (4CIF)
Tredje strömupplösningarna	1280 x 720 (XVGA), 1280 x 960 (720p), 1920 x 1080 (1080p), 352 x 288 (CIF), 640 x 480 (VGA), 704 x 576 (4CIF)
Max. upplösning @ fps	1920 x 1080 @ 50 fps

Lins

Objektivtyp	Varifokal motoriserad
Brännvidd	2.8 to 12 mm, F1.4, horizontal field of view: 92 to 32°
Auto iris	Ja
Auto fokus	Ja
Motoriserat zoom	Ja

Nätverk

Nätverksgränssnitt	RJ-45 10/100 Mbps self-adaptive Ethernet interface
Integration	CGI, ONVIF Profile G, ONVIF Profile S, PSIA
Nätverksprotokoll som stöds	802.1x, DDNS, DHCP, DNS, ezDDNS, FTP, HTTP, HTTPS, ICMP, IGMP, IPv4, IPv6, NTP, PPPoE, QoS, RTCP, RTP, RTSP, SMTP, SNMP, TCP/IP, UPnP

Ljud

Ljudkomprimering	G.711a, G.711u, G.722.1, G.726, MP2L2, PCM
Ljud in	1
Ljud ut	1

Larm I/O

Larmingångar	1
Larmutgångar	1
Larm I / O-anslutning	Terminal Type

Lagring

Lokalt lagringsstöd	Ja
Lokal lagringstyp	Built-in Micro SD/SDHC/SDXC card slot
Max. SD card capacity	128 GB

Video intelligens

ROI	4 configurable fixed regions and 1 dynamic region for license plate tracking
Smart event	Defog, Electronic Image Stabilization (EIS), License plate recognition, Region of Interest (ROI)

Elektrisk

Driftspänning	12 VDC PoE+ (802.3at, class 4)
Energiförbrukning	13.5 W @ 12 VDC Max. 16 W @ PoE+
Nuvarande förbrukning	1.2 A @ 12 VDC Max. 0.4 A @ PoE+

Fysisk

Fysiska dimensioner	302 x 115 mm
Nettovikt	1675 g
Färg	Grå
Form Factor	Kula

Miljö


Miljö	Inomhus, Utomhus
Driftstemperatur	-30 to +60°C
Relativ luftfuktighet	<95% non-condensing
IP-betyg	IP66

Reglerande

Undfallenhet	CE, REACH, RoHS, WEEE
--------------	-----------------------

TVB-5412

TruVision ANPR camera, H.264, 1080p, 2.8-12mm, Super L Light WDR, true D/N, 50m IR, Audio, Alarm, BNC, micro SD/SHDC slot, Intelligence, PoE+ (802.3-at) /12VDC, IP66

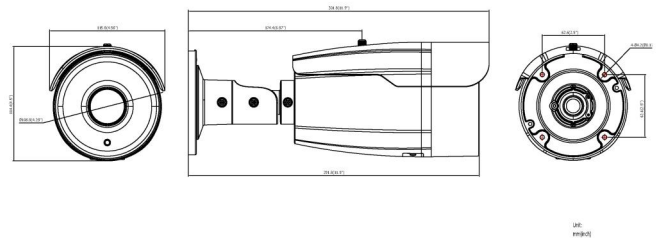

Carrier Fire & Security förbehåller sig rätten att ändra produktspecifikationerna utan föregående meddelande. För de senaste produktspecifikationerna, besök se.firesecurityproducts.com online eller kontakta din försäljningsrepresentant.

Last updated on 5 December 2023 - 17:54