

TruVision Navigator 7.1 Quick Start Guide

This document provides basic instructions for installing TruVision® Navigator and adding a single recorder or camera to enable viewing of video.



- 1 **Navigator toolbar.** Contains the Navigator main menu drop-down list (includes **Settings**, **Device Manager**, **Bookmark Manager**, **Tasks**, **Open Exported Video File**, **Storage Calculator**, **Help**, and **Logout**), the **Search** field, and the **Add Devices** and **Add Folders** buttons.
- 2 **Navigator panel.** Contains recorders, cameras, maps, websites, access control points, and logical views that can be organized within folders.
- 3 **Viewer panel.** Up to 10 tabbed viewing panels can be added by clicking the **+** button.
- 4 **Event Monitor.** A detachable viewing window to view live video from cameras linked to the notifier.
- 5 **Notifier panel.** View real time events coming from TruVision devices. Contains links to the video event notifications as well as the **Event Center** button that launches the Event Center window. Also contains a **Filters** menu to filter event types shown in the Notifier.
- 6 **Collector panel.** Contains all relevant video segments, snapshots, and local recordings ready for export. Also contains the **Export**, **Select All**, and **Trash** buttons.
- 7 **System indicators.** Contains CPU and memory usage meters as well as server and keypad connection status. Move the mouse pointer over the meters to see the percentage of CPU and amount of memory in current use.
- 8 **Playback controls.** Control playback and recording of video.
- 9 **Timeline.** Provides a graphical view of recorded video over a period of time. Contains **Live/Playback** and **Main/Sub** stream toggle controls, **Zoom In/Out**, **Center TimeLine**, **Add Bookmark to Video**, **Jump to the previous bookmark**, **Jump to the next bookmark**, **Bookmarks show/hide on Timeline**, **Go To Date**, **Save Video**, **Snapshot**, **PTZ Controls**, and **Push to Talk** buttons. Color coded video tags are defined in the bottom left of the Navigator screen.

Installation options

There are two installation options for TruVision Navigator. The core features and functions remain the same regardless of which of the two installation options are selected:

- **Standalone model** – This installation option permits the client and database to reside on the same computer. No other clients on the network can connect to the database on this computer. This installation option is ideal for small, standalone systems.
- **Multi-Client Model (traditional client/server)** – This installation option permits the client and server to reside on the same or separate computers. This installation option is ideal for larger systems with many geographically dispersed users, computers, and recording devices.

Installation prerequisites

For each computer:


- Download the latest version of TruVision Navigator from www.interlogix.com/video.
- Download the latest operating system service pack from the Microsoft® Download Center.
- Check for Windows® updates at update.microsoft.com.
- Download the latest video driver.
- For the minimum software and hardware requirements, see the *TruVision Navigator User Manual*.

Installation (standalone or client/server)


Note: Administrator rights are required to install Navigator on a computer, but the application is available to any user that successfully logs in to a Windows account on that computer.

To install TruVision Navigator on a computer:

1. Double-click the TruVision Navigator Setup.exe installer to begin the installation. If prompted, right-click on the Setup.exe file and select **Run as Administrator**.
2. If necessary, click **Yes** in the User Account Control window to make changes to the computer.
3. The End User License Agreement window appears. Select the **I Accept these terms and conditions** check box and then click **Next** to continue.
4. The Welcome window appears. Select **Typical** (standalone installation) or **Advanced** (for a client/server installation or to change the default installation location), and then click **Next**.

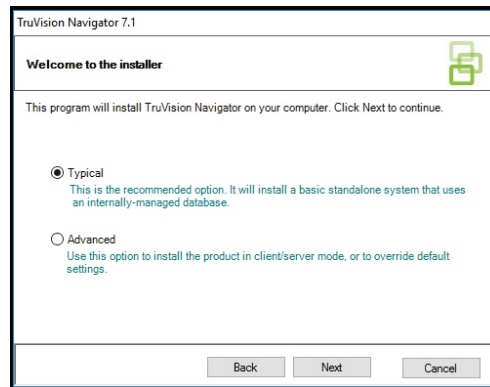

5. **Advanced installation only:** The Installation Folder window appears. Click the **Next** button to accept the default installation folder or click ... to select a different location.
6. **Advanced installation only:** The Configuration window appears. Select **Standalone Mode** or **Client/Server Mode**.

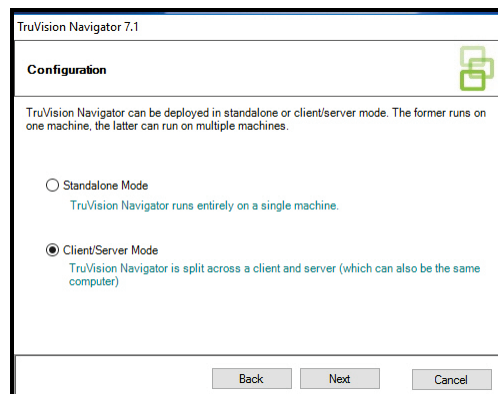

7. Follow all instructions in the subsequent windows until installation is complete.
8. Click **Finish** and then click **Close** to complete the installation. A TruVision Navigator icon appears on the computer desktop and in the **Start** menu.

Note: See the *TruVision Navigator User Manual* for detailed installation instructions.

Logging in for the first time

1. After successful installation, launch TruVision Navigator using one of the following methods:
 - Double-click the TruVision Navigator icon on the desktop.
 - Go to **Start > All Programs > TruVision Navigator**.
2. When TruVision Navigator launches, a login window appears. Log in as the default administrator by typing in the following default credentials:
 - **User Name** – admin
 - **Password** – admin

- Click **Login**. After initial login, the Change Password window displays and prompts to change the default password for security purposes.
- Type the new password in the **Password** field.
- Re-type the password in the **Confirm Password** field.
- Select a question from the **Challenge Question** drop-down list.
- Type the answer to the challenge question in the **Challenge Answer** field.
- Click **OK**.


Adding a single device (recorder or camera)

After successful login, add a single device to the Navigator panel by doing the following:

Click the **Add Device** button  and then select **Add Manually** or **Add via Discovery Tool**.

Add via discovery tool

Using the mouse, select one or more devices from the discovered devices list and then click **Add**.

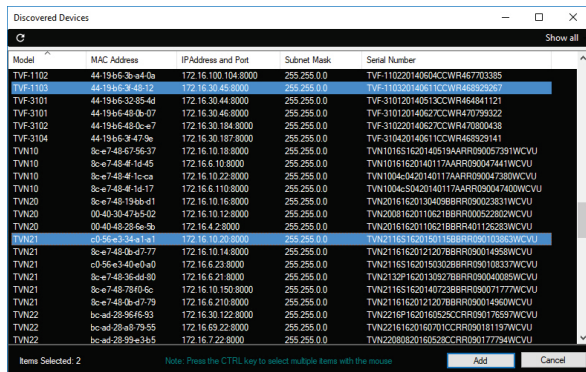


Model	MAC Address	IP Address and Port	Subnet Mask	Serial Number
TFV-1102	44-1966-3e-44-0a	172.16.100.104:8000	255.255.0.0	TFV-110220140624CCWR467703385
TFV-3101	44-1966-32-85-44	172.16.30.44:8000	255.255.0.0	TFV-310120140513CCWR464841121
TFV-3101	44-1966-48-0b-07	172.16.30.46:8000	255.255.0.0	TFV-310120140627CCWR470799322
TFV-3102	44-1966-48-0e-7	172.16.30.184:8000	255.255.0.0	TFV-310220140627CCWR470800438
TFV-3104	44-1966-27-47-9e	172.16.30.187:8000	255.255.0.0	TFV-310420140511CCWR46829141
TVN10	8c-e7-48-4e-16-37	172.16.10.18:8000	255.255.0.0	TVN10161620140519AARR09057391WCWU
TVN10	8c-e7-48-4e-16-45	172.16.10.8000	255.255.0.0	TVN10161620140117AARR090047441WCWU
TVN10	8c-e7-48-4e-16-ca	172.16.10.22:8000	255.255.0.0	TVN1004e0420140117AARR090047380WCWU
TVN10	8c-e7-48-4e-16-17	172.16.10.110:8000	255.255.0.0	TVN1004e0420140117AARR090047400WCWU
TVN20	8c-e7-48-48-19-01	172.16.10.16:8000	255.255.0.0	TVN20161620130488BRR09002383WCWU
TVN20	00-40-30-47-65-02	172.16.10.12:8000	255.255.0.0	TVN20081620110621BRR090052820WCWU
TVN20	00-40-48-28-6e-5b	172.16.4.2:8000	255.255.0.0	TVN20161620110621BRR401126283WCWU
TVN21	c0-56-e3-34-a1-e1	172.16.10.20:8000	255.255.0.0	TVN211616201501158BRR09010386WCWU
TVN21	8c-e7-48-0b-d7-77	172.16.10.14:8000	255.255.0.0	TVN21161620121207BRR090014959WCWU
TVN21	c0-56-e3-40-e0-90	172.16.8.22:8000	255.255.0.0	TVN21161620130326BRR090100337WCWU
TVN21	8c-e7-48-36-d4-90	172.16.6.21:8000	255.255.0.0	TVN21201620130927BRR0900040085WCWU
TVN21	8c-e7-48-78-f0-6c	172.16.10.150:8000	255.255.0.0	TVN21161620140723BRR09001777WCWU
TVN21	8c-e7-48-0b-d7-79	172.16.6.210:8000	255.255.0.0	TVN21161620121207BRR090014960WCWU
TVN22	8c-e7-28-36-f5-93	172.16.30.122:8000	255.255.0.0	TVN2216162016852CCRR09017857WCWU
TVN22	8c-e7-28-36-78-93	172.16.19.22:8000	255.255.0.0	TVN2216162016070CCRR090181197WCWU
TVN22	8c-e7-28-99-e3-65	172.16.7.22:8000	255.255.0.0	TVN22080820160528CCR090177754WCWU

Note: The discovery tool attempts to add a device (recorder or TruVision camera) by using its default credentials. If the credentials of a device are previously changed from default values, the device still gets added to the Navigator panel, but it is shown as offline. In this case, updated credentials need to be applied manually by right-clicking on the device and selecting **Properties** or **Configure Device**.

Add manually

- Select the appropriate model from the **Device Type** drop-down list.

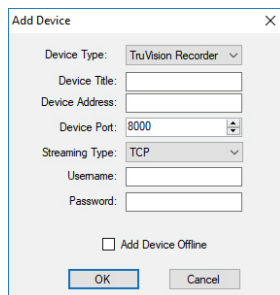

Note: Select **TruVision Recorder** or **TruVision Camera** from the drop-down list for any TruVision device. Using one of these drivers enables the device's browser-based configuration page.

- Type a name in the **Device Title** field. Values are alphanumeric.
- Based on the device type, a selection from the **Streaming Type** drop-down list may be required. For some devices, there is only one option for the **Streaming Type** so it is selected by default.
- Type the device's IP address or the DynDNS or EzDDNS URL in the **Device Address** field.
- The **Port** field is pre-populated with a default value based on the type of device selected. If the port assigned to the device is different from the default value, type the correct port value in this field.
- Enter the **Username** and **Password**. These fields are only required if the device being added has been configured to require a username and password.
- Click **OK**. The device appears under the Devices node in the Navigator panel.

Note: After clicking **OK**, fields highlighted with a red exclamation point indicate rejected values. Hover over the exclamation points for tips on why the values were invalid. All fields must be valid to successfully add a device.

Viewing video from an added camera

- Expand the icon for the added device to view cameras.

Note: An error message may appear stating that the device was added but it has unsupported firmware. This should not prevent the viewing of video.

- Double-click on a camera icon or drag a camera icon from the Navigator panel to a video tile in the Viewer panel to display video.

Help

Click the Navigator main menu button and select **Help**. Click **Launch Help** to open the *TruVision Navigator User Manual*, where more detailed instructions are available on all topics.

Contact information

www.interlogix.com or www.firesecurityproducts.com.

For customer support, go to www.interlogix.com/support.

© 2017 United Technologies Corporation

Interlogix is part of UTC Climate, Controls & Security, a unit of United Technologies Corporation. All rights reserved.

Trade names used in this document may be trademarks or registered trademarks of the manufacturers or vendors of the respective products.