



PM812N-G3


Alimentatore lineare, 13.8 VDC, 1,5 A, certificato EN Grado 3

EN certified

Suitable for use in systems designed to comply with EN50131-6:2008 Grade 3 and Environmental Class II requiring 18Ah standby battery capacity.

Protection

Comprehensive protection is built-in as standard including mains transient filtering, electronic output overload protection and fuses on the load and battery outputs.

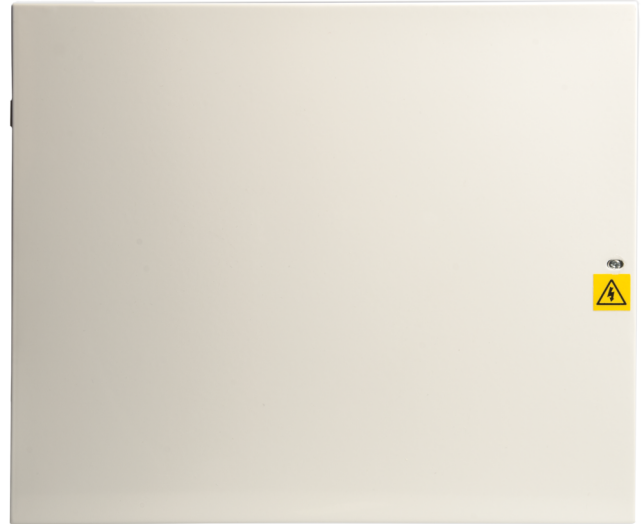

Dettagli

- Intelligent active battery monitoring
- Fault signals for loss of mains, battery fail and power supply fault
- Battery deep discharge protection
- Tamper switch
- Protection against reverse battery connection
- Electronic overload protection
- LED's for comprehensive diagnostics
- Powder coated steel housing
- EN50131-6:2008 grade 3 certified

PM812N-G3

Alimentatore lineare, 13.8 VDC, 1,5 A, certificato EN Grado 3

Specifiche tecniche

Generale

Fusibile(i)	Load: F1.6 A, Batt: F1.6 A
Protezione di scarica profonda	Battery disconnect @ 10.5 V battery terminal voltage
Protezione	Reverse battery connection protection

Elettrico

Ingresso di rete	100 to 240 VAC
------------------	----------------

Uscita

Potenza in uscita	13.8 VDC
Uscita ripple	<400 mV pk-pk max. @ rated voltage
Alimentazione corrente di rete	1.5 A

Batteria

Capacità massima batteria	18 Ah 12 V
Corrente batteria in uscita	12 h, 1.5 A with 18 Ah battery / 30 h, 0.6 A with 18 Ah battery
Tempo di ricarica batteria	<24 h to 80%

Fisico

Dimensioni fisiche	330 x 275 x 80 mm (W x H x D)
Peso netto	3.3 kg (without battery)
Colore	Bianco
Fattore di forma	Armadio in acciaio

Ambientale

Temperatura operativa	-10 to +40°C
Temperatura di immagazzinamento	-20 to +80°C

Regolatorio

Grado EN50131	Grado 3
Conformità	CE, REACH, RoHS 2, WEEE
Certificazioni	EN50131 Grade 3

Physical

Housing (steel) powder coated	1.2 mm
-------------------------------	--------

Regulatory

Certification	EN50131-6:2008 Grade 3 Type A Environmental Class II
---------------	---



In quanto azienda in continua innovazione, Kidde Global Solutions si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 25 April 2024 - 11:04