

# 1X-F2-10

## Conventional Fire Panel - 2 Zone - Italian

### Overview

1X fire control panels offer state of the art architecture in configurations that deliver an uncomplicated solution for small to mid-sized conventional applications. They feature an attractive contemporary design that fits with any decor. The gently curved door front offers a distinctive flair. Operator controls are inset in a striking black lexan.

With support for multiple lines of conventional detectors and accessories, these quick-to-configure systems offer versatility that benefits building owners and installation/maintenance companies alike.

### The Panel

The 1X-F2 is a conventional fire alarm control panel. It is supplied in local language with 2 zones that support up to 32 devices per zone, as well as up to 2 supervised relay outputs dedicated to sounder control. In addition 2 conventional relay outputs dedicated to common fire and fault conditions, as well as two user configurable inputs for monitoring and control are available.

### Options

The panels support 2 types of auxiliary relay boards, one with 4 standard relays, and one with 4 supervised relays. With these boards the panel outputs may be expanded with up to 8 additional outputs.

### Approvals & Compliance

The product line carries the following accreditations:

- EN54:2, EN54:4 and CE approved
- CPD certified
- NEN2535, NBNS21-100 and BS5839-1 compliant
  
- WEEE compliant
- RoHS compliant

Type class conditions: 3K5 of IEC 60721-3-3



### Einzelheiten

- Modern, elegant design
- Easy removable parts for quick and clean installation
- Default regional setup modes
- Normal, head-out & intrinsically safe zone support
- Supervised alarm notification outputs
- EN54 compliant potential free fire & fault relays
- Class change, day/night & remote reset facilities
- Auxiliary 24VDC supply output with reset support
- Default support for special functions such as: - EN54 compliant user access levels - mixed zones - full front panel diagnostics - one-man walk test - CleanMe™
- Auxiliary standard & supervised relay output boards
- Networkable up to 64 zones

# 1X-F2-10

## Conventional Fire Panel - 2 Zone - Italian

### Technische Spezifikationen

#### Allgemein

Maximale Systemkapazität (Anzahl der Geräte)	bis zu 1280
Netzwerkgröße (Knoten)	bis zu 32

#### Elektrische Angaben

Netzteil	VAC
Energieverbrauch	2 A @ 24 VDC
Betriebsspannung	110 VAC @ 50 Hz or 230 VAC @ 50 Hz (+10% -15%) Cable type: 3 x 1.5 mm <sup>2</sup> (live, neutral, earth)
Aktueller Verbrauch	2 A @ 110/240 VAC 50 mA (quiescent, no devices) (panel supply) 130 mA (alarm, no devices) (panel supply)

#### Schleife

Maximale Ringkapazität	2
------------------------	---

#### Zoniert

Maximale Meldergruppenkapazität	bis zu 2
Betriebsspannung	22 VDC (18 to 24 VDC)
Anzahl der Geräte pro Bereich	32 max.
Klasse	65 mA (max. Load)
Kabel Klasse	40 ohm (max cable resistance), 500 nF (max cable capacitance)

#### Eingang

Anzahl Eingänge	2
Eingangstyp und Klasse	100 ohm (max. Cable resistance)

#### Ausgang

Überwachungsspannung	-15 to +28 VDC
AUX-Spannung	24 VDC (21 to 28 VDC)

#### Standby Batterie

Kapazität	2 x 12 V, 7.2 Ah (SLA)
-----------	------------------------

#### Physikalisch

Formfaktor	Klein
Abmessungen	320 x 435 x 134 mm (W x H x D)
Nettogewicht	2.8 kg (without battery)
Liefergewicht	4.5 kg
Farbe	Grau (RAL 7035)
Montage	Oberflächenmontage
Kabeleinführungen	Ø 20 mm - 14 / 2 / 12 (top / bottom / rear)

#### Umweltbedingungen

Betriebstemperatur	-5 to +50°C
Lagertemperatur	-20 to +70°C
Relative Luftfeuchtigkeit	10 to 95% noncondensing
Umgebung	Drinnen
IP Klassifizierung	IP30

#### Regulativ


Kompatibilität	CPD, RoHS, WEEE
Zertifizierung	EN54-13, EN54-2, EN54-4

#### Output

Supervised Outputs	2
Load (max.)	250 mA
Non Supervised Outputs	2
Load	2 A @ 30 VDC

#### Auxilliary Supply Output

Load (max.)	250 mA @ 25°C / 195 mA @ 40°C
-------------	-------------------------------

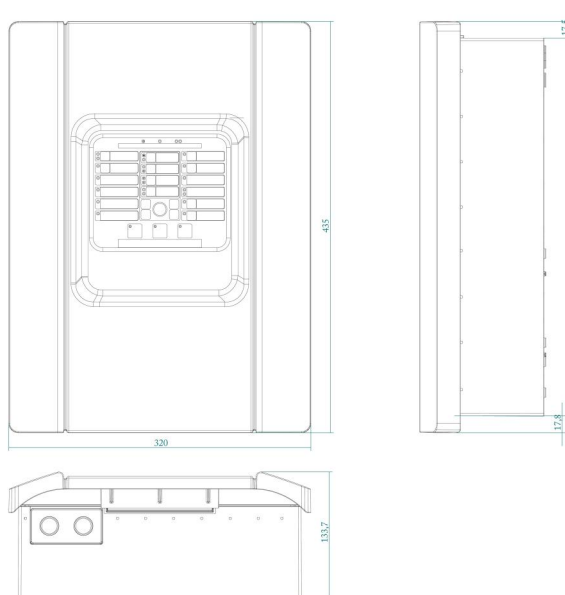

Als innovatives Unternehmen behält sich Carrier Fire & Security das Recht vor, Produktspezifikationen ohne Ankündigungen zu ändern. Für die aktuellsten Produktspezifikationen, besuchen Sie bitte [de.firesecurityproducts.com](http://de.firesecurityproducts.com) online oder kontaktieren Sie bitte unsere Vertriebsmitarbeiter.