



# TVE-410

## TruVision IP Encoder, 4 CH, 960H, Audio, Alarm, RS-485, PoE (803.AF) /12VDC, Compact

### Overview

---

The TruVision TVE Series IP Video Encoders includes 1-, 4-, 8- and 16-channel encoders, allowing you to transform analog camera signals to a H.264 compressed IP signal. This product is an ideal solution to help you gradually upgrade and migrate video surveillance systems from analog to IP. Instead of replacing entire systems, viable analog cameras can be integrated in new IP based systems, simply by using the range of TruVision encoders.

### Compression & streaming

---

TruVision encoders utilize H.264 compression with dual-streaming capability, making it easy to manage the encoder's bandwidth usage. These encoders are designed to adhere to PSIA and ONVIF open communication standards, and also support a CGI command set for simple integration into any IP system. Video streams can be set for high and low bandwidth and images can be streamed for live viewing or sent to a designated recording location.



### Details

---

- 4 channel encoder
- Supports H.264, MPEG4 and MJPEG compression
- Real-time 960H on all channels
- Encoding resolution 960H, 4CIF, 2CIF, CIF, QCIF
- Dual streaming functionality
- Compliant to ONVIF/PSIA/CGI
- 4 channel audio input
- 4 alarm inputs
- 2 alarm output

# TVE-410

TruVision IP Encoder, 4 CH, 960H, Audio, Alarm, RS-485, PoE (803.AF) /12VDC, Compact

## Technical specifications

### General

Technology	Encoder (Analog to IP)
Supported video standard	CGI, ONVIF, PSIA
Motion detection	Yes
Supported PTZ protocols	Pelco-D, Pelco-P, TruVision RS-422, TruVision RS-485
Watermark	Yes
NAS support	Yes
Software compatibility	Advisor Management Software (ATS8600), MASTerMind, OnGuard, Prism, Prism Mobile, TruPortal, TruVision Navigator, TVRmobile, UltraView

### Video / audio inputs

Video standard	NTSC, PAL
Video compression	H.264, MJPEG, MPEG-4
Analog video inputs	4
Audio compression	G.711
Audio inputs	4-ch, Pin Connector Interface (2 Vp-p, 1 kΩ)
Bi-directional audio inputs	1-ch, RCA (2.0 Vp-p, 1 kΩ) Using Audio In inputs

### Video / audio outputs

Video bit rate	32 kbps to Max. 8192 kbps
Stream type	Video, Video & audio
Multi streaming	Dual Streaming
Main stream resolution fps	2CIF@25fps, 4CIF@25fps, 960H@25fps, CIF@25fps
Sub stream resolution fps	2CIF@8fps, 4CIF@4fps, 960H@2fps, CIF@12fps, QCIF@25fps
Audio outputs	1-ch, 3.5mm Interface (Linear, 600 Ω)
Audio bitrate	64 kbps

### Interfaces

Network interface	1, RJ45 10 M / 100 M Auto-Negotiate Ethernet Interface
Serial interface	RS-485
Alarm inputs	4
Alarm out	2

### Electrical


Power supply type	VDC
Power supply value	12VDC / PoE (IEEE802.3-af)
Power consumption	Max. 8W
Current consumption	670

### Physical

Physical dimensions	114 x 48 x 128 mm
Net weight	557 g
Form factor	Desktop

### Environmental

Operating temperature	-10 to +55 C° 14 to 131 °F
Relative humidity	10 to 90% noncondensing

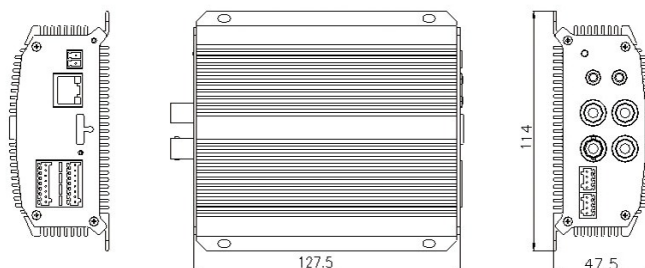

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit [uk.firesecurityproducts.com](http://uk.firesecurityproducts.com) online or contact your sales representative.

Last updated on 5 May 2023 - 9:34