



2X-FR-FB2

Addressable Fire Panel Repeater with Fire Brigade controls

Overview

The 2X Series life safety control systems are bringing the speed and functionality of high-end intelligent processing to small to mid-sized addressable applications. They feature an attractive contemporary design that fits with any decor. Special plastics allows for painting in any color and the easy to remove electronics will support in this matter. The gently lined door with the intuitive blue inset user interface and EN54 compliant graphical LCD offers a distinctive flair. The main controls are clearly, but discreetly highlighted with the focus on the central located Jog Dial. With the addressable detection and a full line of easily configured option cards and modules, USB and Ethernet® connectivity, these quick-to-configure systems offer versatility that benefits building owners and life safety system installers alike.

The Panel

The fire panel repeaters, with user interface with fire brigade and fire protection controls, supplied in local language come with a 2010-2-NB network board already fitted. Except for having no addressable loops and corresponding programmable outputs, the setup is similar as a normal fire panel. It and has its own power supply, 2 conventional relay outputs and 2 supervised outputs, working in pair and dedicated to common fire and fault conditions, as well as 2 user configurable inputs for monitoring and control are available.

Options

The repeaters use a node on the network, similar like a normal panel with a maximum of 32 nodes / 32 loops network of fire panels and fire panel repeaters (including conventional fire panels and fire panel repeaters up to a maximum of 64 conventional zones). Last but not least, in case separate zone indications are required, a 20 or 40 zone fire/fault LED indicator board can be mounted in the panel or repeater with ample space for text.

Approvals & Compliance

- CE / CPD / EN54-2 / EN54-4 / EN54-21
- NEN2535 / NBNS21-100 compliant
- BS5839-1 compliant
- VdS and LPCB certified
- WEEE / RoHS compliant



Details

- Local or global repeater with Fire Brigade and Fire Protection controls with or without global control functionality
- Up to 40 LED Zone indicators for Fire and Fault with ample text space
- Auto configuration, setup wizards and default EN54 setup modes
- Ethernet port with TCP/IP for remote diagnostics, maintenance and programming
- EN54 compliant graphical LCD with icons and up to 256 zones
- Jog Dial with 4 soft buttons for simple and intuitive user control
- Aesthetic pleasing design with special paintable synthetic door
- Easy removable door and chassis for quick and clean installation
- All pluggable connectors
- 3 USB ports with memory stick support and RS232 for printer support
- Email notification for events directly from the panel (4 user accounts)
- Auxiliary 24VDC supply output with reset support
- 3 operator level menu structure (20 usernames and passwords)
- History log memory for 9999 events
- Up to 72 hours standby time and 30 minutes alarm
- Comes standard fitted with network board

2X-FR-FB2

Addressable Fire Panel Repeater with Fire Brigade controls

Technical specifications

General

Network size (nodes) up to 64

Electrical

Power supply type VAC
Operating voltage 110/230 VAC (+10%/-15%), 50 / 60 Hz (±5%)
Cable type: 3 x 1.5 mm² (live, neutral, earth)
Current consumption Nom. 0.6 / 1.3 A, Max. 1.5 / 3.15 A
2 / 4 A (Fuse rating)

Input

Input type and rating 150 mA (max. Load), Cable type Recommended 2 core 1.5 mm² twisted pair
Programmable 2
Termination 15 kohm

Output

Output type and rating Cable type Recommended 2 core 1.5 mm² twisted pair
Termination 15 kohm
General Fire + Fault supervised 2, 350 mA, 19.5 to 28 VDC (24 VDC nominal)
General Fire + Fault relay 2
Aux 1 resetable, 500 mA, 19.5 to 28 VDC (24 VDC nominal)

Standby battery

Capacity Max. 2 x 12 V, 18 Ah (use supplied cables)

Physical


Form factor Large
Physical dimensions 450 x 550 x 171 mm (W x H x D)
Net weight 7.4 kg (without battery)
Shipping weight 10.1 kg
Colour Grey (RAL 7035)
Mounting type Surface mount
Cable entries 18 (20 mm) / 2 (20 mm) / 2 removable plates (Top / Bottom / Back)

Environmental

Operating temperature -5 to +40°C
Storage temperature -10 to +50°C
Relative humidity 95% max. noncondensing
Environment Indoor
IP rating IP30: for indoor use only

Regulatory

Compliance BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE
Certification EN54-2, EN54-21, EN54-4, VdS

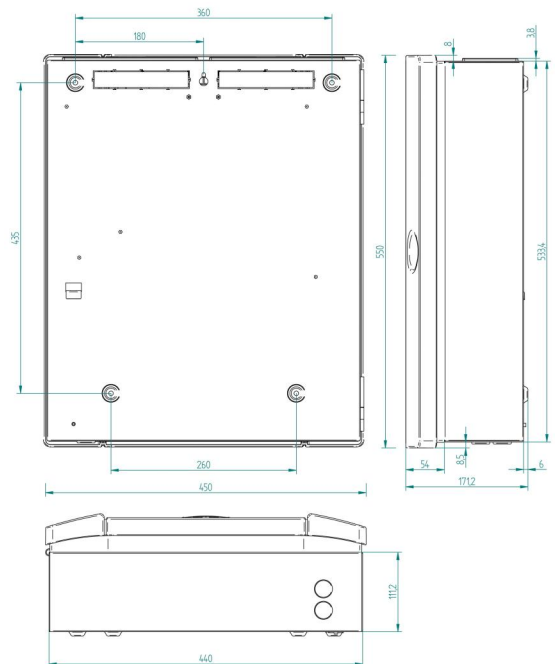

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 18 February 2025 - 11:37