

1X-X3-32

Conventional Fire and Extinguishing Panel - 3 Zone - French Belgian

Overview

1X fire control panels offer state of the art architecture in configurations that deliver an uncomplicated solution for small to mid-sized conventional applications. They feature an attractive contemporary design that fits with any decor. The gently curved door front offers a distinctive flair. Operator controls are inset in a striking black lexan.

With support for multiple lines of conventional detectors and accessories, these quick-to-configure systems offer versatility that benefits building owners and installation/maintenance companies alike.

The Panel

The 1X-X3 is a conventional fire alarm and extinguishing control panel. It is supplied in local language with 3 fire zones that support up to 32 devices per zone. These zones may be configured for extinguishing in single zone or double zone configuration in any combination of zones. In addition the panel offers supervised outputs for first stage notification, second stage notification as well as optical warning indicators and actuator activation. Standard relay outputs are provided for EN54 compliance and system status notification, as well as multiple inputs for system control.

Options

The panels support 2 types of auxiliary relay boards, one with 4 standard relays, and one with 4 supervised relays. With these boards the panel outputs may be expanded with up to 16 additional outputs.

Approvals & Compliance

The product line carries the following accreditations:

- EN54:2, EN54:4 and CE approved
- CPD certified
- EN12094-1 certified

- WEEE compliant
- RoHS compliant



Détails

- Modern, elegant design
- Easy removable parts for quick and easy installation
- Normal & head-out supervision support per zone
- Three detection zones
- Single zone, double zone or any combination of zones configurable for release
- 6 Pre-configured relays and 8 supervised inputs for extinguishing control
- Configurable fire routing, sounder, extinguishing, reset and door monitoring delays
- Configurable "Hold Mode" type-A or type-B
- Sounders configurable for pulsing or continuous operation
- Extinguishing agent flow confirmation
- Continuous or resettable 24 VDC auxiliary supply
- Auxiliary standard & supervised relay output support
- Default support for special functions such as: - EN54 compliant user access levels - Basic & Advanced level configuration - mixed zones - front panel diagnostics with test & disable control - one-man walk test

1X-X3-32

Conventional Fire and Extinguishing Panel - 3 Zone - French Belgian

Spécifications techniques

Général

Capacité maximale du système (comptage de périphérique) Jusqu'à 96

Électrique

Type de bloc d'alimentation VAC
Tension de fonctionnement 110 VAC @ 50 Hz or 230 VAC @ 50 Hz (+10% -15%)
Consommation de courant 3.15 A @ 110/1.5 A @ 240 VAC

Boucle

Capacité maximale de boucle de masse 3

Zona

Capacité maximale de zone Jusqu'à 3
Quantité de dispositifs par zone 20 max.

Batterie de secours

Capacité 2 x 12V 12 Ah (SLA)

Caractéristiques physiques

Types de format Moyenne
Physical dimensions 440 x 480 x 140 mm (W x H x D)
Net weight 3.9 kg (without battery)
Shipping weight 6 kg
Couleur Gris (RAL 7035)
Mounting type Montage en surface
Entrées de câble Ø 20 mm - 20 / 2 / 26 (top / bottom / rear)

Environnement

Température de fonctionnement -5 to +50°C
Température de stockage -20 to +70°C
Humidité relative 10 to 95% noncondensing
Environnement Intérieur
Indice de protection IP30

Régulateur

Compliance CPD, RoHS, WEEE
Certification EN12094-1, EN54-13, EN54-2, EN54-4

Input Supply

Cable specification 3 x 1.5 mm² (live, neutral, earth)

Panel Supply

4A @ 24 VDC
Quiescent current (no devices) 0.39 A
Alarm current (no devices) 2.78 A

Zones

3
Output voltage 22 VDC (18-24 VDC)
Load (max) 65 mA
Cable resistance (max) 40 ohm
Cable capacitance (max) 500 nF
Devices per zone (max) 20

Supervised Inputs

6
Use MCP Start, MCP Hold, MCP Abort, Pressure Switch, Gas Flow, Door Monitor

Non Supervised Inputs

2
Use Auto/Manual mode, Remote Reset

Supervised Outputs

4
Use Fire Sounders, Extinguishing Sounders, Optical Indications, Actuator
Notification 2 x 500 mA @ 24 VDC
Visual indicators 1 x 500 mA @ 24 VDC
Actuator 1 x 1A @ 24 VDC

Non Supervised Outputs


4
Use Hold Mode, Abort Mode, Manual Mode, Release Indication

Auxilliary Supply Output

Output voltage 24 VDC (21-28 VDC)
Load (max) 250 mA

1X-X3-32

Conventional Fire and Extinguishing Panel - 3 Zone - French Belgian

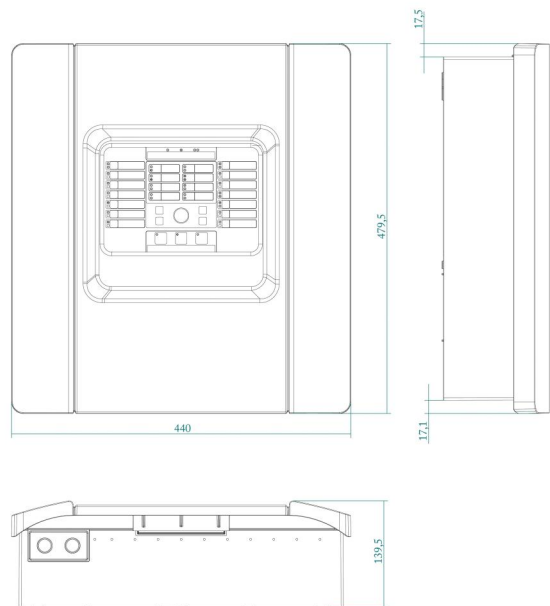

En tant que société d'innovation, Carrier Fire & Security se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 15 February 2024 - 10:16