HB304

Surface mount panic switch, latching red LED indicator and screw terminals, SPDT, white

The HB304 Panic Switch activates the alarm output when the user pulls the actuating lever. An external LED lights and latches, indicating that the alarm circuit has been activated. The lever is closed first to rearm the alarm switch, then the latching LED circuit is reset externally at the control panel.



Applications

Mounted out of sight but within easy reach for manual activation, such as under desks or counters in banks, jewelry stores and other facilities where people or property are at risk.

Détails

- Mounts underneath or on side of desk or counter
- Smooth housing prevents accidental damage to clothing
- Actuating lever designed to accommodate only tip of finger
- Reed contact resets when lever is in closed position
- Version with latching LED available

HB304

Surface mount panic switch, latching red LED indicator and screw terminals, SPDT, white

Spécifications techniques

Général

Type	Interrupteur
Résistance à l'eau	Non
LED	Oui
Enclenchement de circuit LED	Oui
Contact d’alarme	SPDT
Connexions	Screw terminals

Filaire / sans fil

Filaire / sans fil	Câblés

Électrique

Valeur de l'alimentation	7 to 15 VDC
Consommation de courant	8 mA max.

Caractéristiques physiques

Dimensions physiques	74 × 45 × 19 mm
Couleur	Blanc

Environnement


Température de fonctionnement	-18 to +43°C

Output

Relay	SPDT

General

LED colour	Red

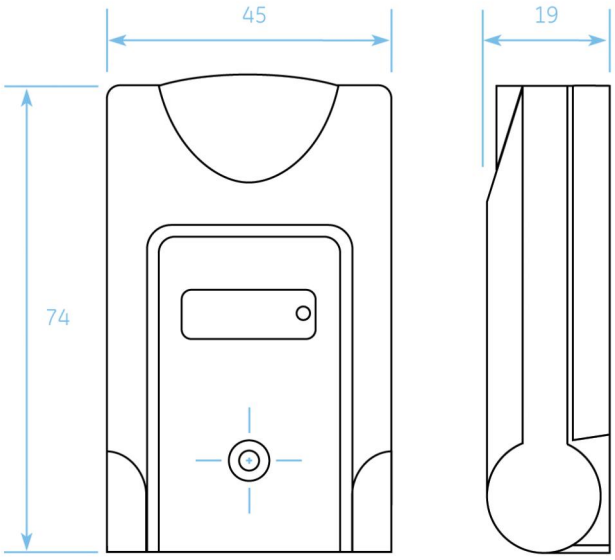

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 18 June 2026 - 14:23