

# NS3553-4P-1T-2S

## 4-Port Gigabit Ultra-PoE Industrial Managed Switch

### Overview

For fast and efficient connectivity from the network edge to a backbone switch or server, the IFS® 4-Port Gigabit Ethernet Managed Switch by Interlogix features four Gigabit Ethernet ports with support for Ultra-PoE (60w) plus 2 SFP ports and a gigabit RJ45 uplink port. Both 100Base-X or 1000Base-X transmission is supported through four GBIC interfaces.

For efficient switch management, the Switch is easily programmable via a simple, yet powerful Web Interface.

### Engineered for Real-time Performance

This switch is designed with a high performance non-blocking switch fabric and provides wire-speed throughput as high as 14 Gbps. The Switch classifies and prioritizes Layer 2 802.1p or Layer 3 IP TOS/DSCP traffic into four hardware queues that support strict or Weighted Round Robin (WRR) queuing algorithms. This functionality provides maximum allocation of limited network resources and guarantees best performance for real-time applications.

### Full Power, Isolated per Port PoE

This Gigabit Ultra-PoE Managed Switch provides optimized deployment and safe power management to PoE edge devices such as IP Surveillance cameras, access control panels, wireless access points (WAP) and Voice over IP (VoIP). Full power PoE-Ultra (60w) is provided to all 4-ports with no power sharing, and added port circuit protection isolates and prevents power interference between ports.

### Built-in Monitoring, Diagnostics and Troubleshooting Tools

The Switch can be configured to monitor a connected PD (Powered Device) status in real-time via IP ping. If a PD (IP Camera or IP Access Reader) no longer responds to a ping, the switch will cycle PoE power on the port thus rebooting the PD back to operational status. This along with built-in cable diagnostics, and support for SNMP can greatly enhance the IT administrator's trouble-shooting and management abilities.



### Détails

- 4-Port 10/100/1000Base-T RJ-45 with IEEE 802.3af / 802.3at / Ultra PoE (60W)
- 1-Port 10/100/1000Base-T RJ-45 uplink
- 2-Port 100/1000Base-X mini-GBIC/SFP slots, SFP type auto detection with digital diagnostics monitoring (DDM) functions.
- 1 x RS-232 console interface for basic management and setup
- Web-based, telnet, SSH, SSL and console command line management, IP address security management to prevent unauthorized intruder
- RADIUS / TACACS+ users access authentication
- Prevents packet loss with back pressure (half-duplex) and IEEE 802.3x pause-frame flow control (full-duplex) groups, out of 4K VLAN IDs
- IP-Based Access Control List (ACL), MAC-Based Access Control List, Source MAC / IP address binding
- Ingress/egress bandwidth control on each port
- Supports IGMP Snooping v1, v2 and v3, IGMP query mode for multicast media application and Multicast VLAN Registration
- Port mirroring to monitor the incoming or outgoing traffic on a particular port
- Supports LLDP to allow switch to advise its identification and capability on the LAN
- IPv4 and IPv6 IP Address / NTP / DNS management
- Cable Diagnostic technology provides the mechanism to detect and report potential cabling issues

# NS3553-4P-1T-2S

## 4-Port Gigabit Ultra-PoE Industrial Managed Switch

### Spécifications techniques

#### Général

Fast ring	Oui (ERPS)
Contrôle orage	Broadcast, Multicast, Unicast
Sécurité	802.1x, ACL, RADIUS, Source MAC / IP address binding
Recherche DHCP	Oui
Sortie relais défaut	Yes, with 2x digital inputs and <n>2x digital outputs

#### Catégorie

Catégorie	Industriel
Gestion	Géré
Géré	Oui (Layer 3 - Limited)
PoE	Oui

#### Ports physiques

Nombre de ports	5
Type de port	Gig
Vitesse	Gigabit
PoE / PoE+	4 Port PoE/4 Port PoE+/4 Port PoE-Ultra
Port fibre	2 SFP
Prise en charge SFP	Série S20/S25, Série S30/S35
Vitesse SFP	100/1000

#### Performances des commutateurs

Structure de commutation	14 Gbps
Débit (Mpps)	10.42
Table MAC	8 K
Jumbo frame support	9 K

#### Fonctions de la couche 2

Interface de gestion	Console, Web, Telnet, SNMP 1,2,3, SSH/SSL secure access
Surveillance IGMP	255 Group, Snooping v1, v2, v3
Requête IGMP	Qui
VLAN, QoS	256, yes
Liste de contrôle d'accès	123 entries

#### Électrique

Budget d'alimentation PoE	240 W
Type de bloc d'alimentation	52 à 56 VCC
Consommation électrique	282 W (Max.)

#### Caractéristiques physiques


Dimensions physiques	72 x 107 x 152 mm
Poids net	1050g
Type de montage	Rail DIN, Fixation murale

#### Environnement

Température de fonctionnement	-40 to +75°C
Température de stockage	-40 to +75°C
Humidité relative	5 to 95% (non-condensing)
Environnement	Intérieur

#### Régulateur

Normes IEC	IEC60068-2-27 (shock), IEC60068-2-32 (free fall), IEC60068-2-6 (vibration)
Conformité	CE, FCC Part 15 Class A

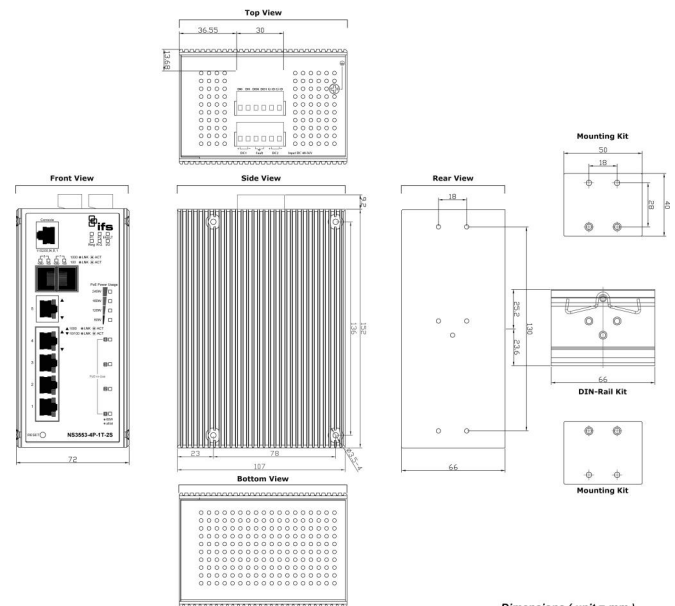

Dimensions (unit = mm)



En tant que société d'innovation, Carrier Fire & Security se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web [be.firesecurityproducts.com](http://be.firesecurityproducts.com) ou contactez votre représentant commercial.

Last updated on 22 May 2023 - 16:19