

2X-F2-FB2-PRT-46

Addressable Fire Panel with User Interface with Fire Brigade Controls with Printer - 2 Loop



Details

- 2 loops expandable to 4 with up to 256 zones with Fire Brigade & Fire Protection controls and 300 output groups
- Up to 40 LED Zone indicators for Fire and Fault with ample text space
- Auto configuration, setup wizard and default regional setup modes
- Ethernet port with TCP/IP for remote diagnostics, maintenance and programming
- EN54 compliant graphical LCD with icons and up to 256 zones
- Jog Dial with 4 soft buttons for simple and intuitive user control
- Aesthetic pleasing design with special paintable synthetic door
- Easy removable door and chassis for quick and clean installation
- All pluggable connectors
- 3 USB ports with memory stick support and RS232 for printer support
- Email notification for events directly from the panel (4 user accounts)
- Auxiliary 24VDC supply output with reset support
- 3 operator level menu structure (20 usernames and passwords)
- History log memory for 9999 events
- Up to 72 hours standby time and 30 minutes alarm
- Compatible with the new loop powered sounders/beacons and base sounders and the 2000 series detectors with replaceable optical chamber

2X-F2-FB2-PRT-46

Addressable Fire Panel with User Interface with Fire Brigade Controls with Printer - 2 Loop

Technische specificaties

Algemeen

Maximale systeemcapaciteit (aantal apparaten) up to 32768

Network size (nodes) up to 64

Elektrisch

Power supply type VAC

Lus

Maximale luscapaciteit 4

Zone

Maximale zonecapaciteit up to 512

Fysiek

Form factor Groot

Colour Grijs (RAL 7035)

Mounting type Oppervlaktemontage


Omgeving

Environment Binnen

Regelgeving

Compliance BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE

Certification EN54-13, EN54-2, EN54-21, EN54-4, VdS

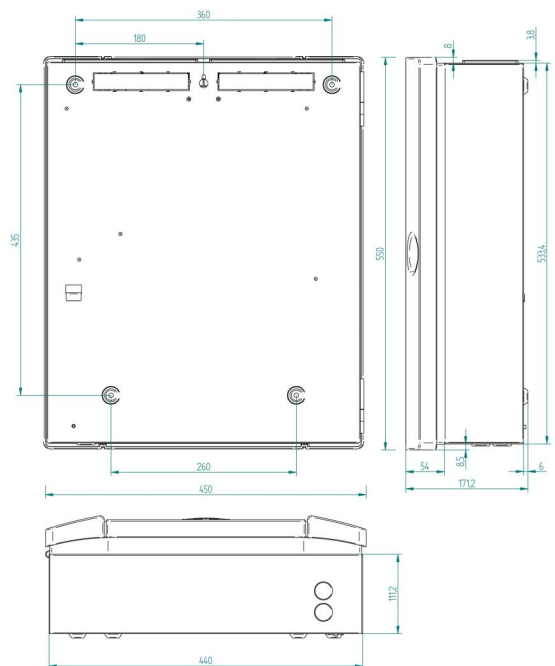

Als een bedrijf van innovatie behoudt Carrier Fire & Security zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 16 February 2024 - 12:24